

The background of the advertisement features a vibrant, abstract design with diagonal stripes in shades of red, orange, and blue. A thick, braided cable with a red and black patterned outer sheath curves across the upper half of the image. In the lower center, there is a white line-art illustration of the Eiffel Tower. To the right of the tower, two Real Cable connectors are shown: one is a red cable with a silver connector, and the other is a black cable with a silver connector. Both connectors have the Real Cable logo and 'Limited Edition' text on them.

Real Cable[®]

CONDUCTEUR D'ÉMOTIONS

REAL-CABLE.COM



DESIGNED AND ENGINEERED IN PARIS



Dear Partners,

Reliable to our philosophy, we keep promoting the innovation without resting on our past achievements. We are collaborating with the best partners in order to develop the strongest Real Cable® team spirit and enable us to find the best solutions ever known.

The main target of Real Cable® brand still remains the entire satisfaction of the customers. That's why, we place ourselves at the end users' point of view.

Today Real Cable® brand is well known in more than 25 countries all around the world with an "Excellence Reputation" of which we are proud of.

We owe this very good reputation to our customers. They respect deeply our quality and our design. The Real Cable® brand speaks for itself.

We thank all our partners and friends in France and all around the world, who constantly help us to improve Real Cable® brand.

Catherine & Marcel Torchin
Real Cable's Co-founders

"Excellence Reputation" : Patrick Vercher – Stéréo & Image.



HDMI



HDMI ACCESSORIES



SPEAKERS



AUDIO



POWER



NOMADE



DATA



ACCESSORIES



VINTAGE



MONITEUR
BY REAL CABLE



PRESS REVIEW



Real Cable® philosophy

Since its creation, Real Cable's Leitmotiv, a French company which develops and designs its own products, has always been to offer the best cable at the best price.

Real Cable® products fill the consumer's needs in and bring real technological plus at the same time.

Therefore all our models, even from entry level range, have been designed without compromise to guarantee an optimal transmission quality.

As for High-End models, they justify their prices by very specific technologies use and by definite choices for the manufacture or the structure.

Welcome to Real Cable®



Real Cable® designs and develops its own products, and bring a specific care to their manufacturing by using the latest generation of machine tools. Moreover Real Cable is so confident in its products that all cables are lifetime guaranteed* !



*Real Cable® electronic devices are 2 years guaranteed.

Real Cable's features

THE CONDUCTOR'S TYPE SIGNIFICANCE



In order to offer the best quality possible, all Real Cable cable are at minimum made of 99.99 % Oxygen Free Copper, also known as OFC. A guarantee of reliability and durability, to provide an excellent transmission. With such a high quality copper, Real Cable products are developed to last and satisfy you for a long time. For High-End products, the quality of copper is even further enhanced with an extensive 99.9999 % deoxygenation, thanks to the famous Ohno Continuous Casting, also known as OCC, invented by Professor Ohno. This allows a higher purity which results in a close to perfection quality transmission. At last, the use of silver in the conductor's structure is not just an aesthetic effect. It's really for a better quality in high frequencies' reproduction.

TDC TECHNOLOGY (AUDIO & SPEAKER CABLE)



TDC = Time Difference Control. Through the use of wires of different sections within the cable, the different frequencies' propagation time is optimized, each one taking the conductor that suits it best :

- fine strands for high frequencies.
- larger strands for lower frequencies.

This propagation's optimization between basses and trebles can significantly improve the electrical phase of the signal based on frequencies, which results in a more realistic soundstage, with fully staged plans and an impressive side opening.

TDC technology is found in the speaker cables but also in the audio cables.

NANOTECH® TECHNOLOGY (HDMI CABLE)



Thanks to the use of very high quality conductors extremely thin in some new generation HDMI cables, Real Cable® is able to offer smaller and more flexible models. Despite this miniaturization, all HDMI features are preserved without compromising on the image and sound quality.

THE CONNECTOR'S TYPE SIGNIFICANCE



The best cable is nothing if the connection is not qualitative enough. Therefore, all Real Cable® connectors are at least gold-plated to ensure contacts' reliability and longevity. Real Cable® also develops plugs for each specific type of connectors, ensuring optimum interconnection. For example, TwistLock® is perfect for tightening RCA plugs on. The XLR Real Cable® are all ClickLock® models, an effective locking system for perfect connection. For HDMI interconnection, Real Cable® suggest SafeLock II® for a high definition link as reliable as possible, avoiding disconnections, by screwing the plug on the device.

"SUR MESURE" MADE IN FRANCE



Need a specific length or cable unavailable in the catalogue ? Real Cable® is able to make custom cables, assembled and hand soldered in our French workshop. Speaker cables with pre-installed banana plugs, bi-wiring, very long audio cables, many possibilities are allowed.

ITEM

HDMI

HDMI cables

High Definition Multimedia Interface, this connection allows you to transfer video and audio, like its predecessor, but with one significant difference : the signals are no longer analog but digital. Image and sound are transmitted with an optimal quality. So as not to lose the full benefit of this now necessary and even indispensable connection for HD, 3D, Ultra HD we must pay attention to the quality of the cables and even on very large lengths, otherwise have digital noise, sudden changes in image or sound...


All Real Cable® HDMI cables are certified by the accredited test centers (HDMI Authorized Test Center) and this guarantee the highest security and compatibility in their operation, especially on the large lengths of cable.

HDMI CABLES MASTER HDMI CABLE

TYPES OF CABLES AND LOGOTYPE



High Speed HDMI cable with Ethernet channel. Maximum compatibility : CEC, Deep Color, xvColor, 1 080p, 3D, ARC, HEC, 4K.



High Speed HDMI cable (without Ethernet channel). Compatibility : CEC, Deep Color, xvColor, 1 080p, 3D, ARC, 4K.



Stands for "High Dynamic Range." HDR is a technology that improves the range of color and contrast in a digital image. It may be used for both photos and videos, though the implementations are different.



Ultra HD 4K is a display standard that includes televisions, monitors, and other video equipment that supports a horizontal resolution of roughly 4,000 pixels. The most common 4K standard is Ultra HD (or UHD), which has a resolution of 3840 x 2160 pixels (3,840 pixels wide by 2,160 pixels tall). It is exactly twice the resolution of HDTV (1920 x 1080) and has an identical 16 x 9 aspect ratio.



With the arrival of HDMI 2.0 you can go even further by offering higher frame rates (60 Hz / 60 frames per second) with larger color depths (10 bits for HDR), all with 4K UHD resolution of 3840 x 2160 pixels. The HDMI 2.0 is supporting a high speed of 18 Gbit / s.



HDMI (High-Definition Multimedia Interface) is a proprietary audio/video interface for transmitting uncompressed video data and compressed or uncompressed digital audio data from an HDMI-compliant source device, such as a display controller, to a compatible computer monitor, video projector, digital television, or digital audio device. HDMI is a digital replacement for analog video standards.

Recommended for ultra High Definition and High Definition audio and video connections : DVD players, Blu-ray players, DVD recorders, digital TV decoders, flat TVs, video projectors, video game consoles, Home Theater amplifiers, etc.

HD-E-2 HDMI™

Easy installation HDMI cable



Tin-plated and 99.99% oxygen free copper (OFC) conductors, strong section cable, double shielding, removable metallic plugs, gold contacts, plenty of available lengths, 1 male HDMI plug / 1 male HDMI plug. Very High Speed with 18 G/bits.

Excellent performance in Ultra HD, Full HD and in 3D even on large lengths, 4K (4096 x 2160 p 60) Removable plug covers to facilitate the route of the cable in an integrated duct (Ø 25 mm minimum recommended).

From 7.50 m to 20 m : Active HDMI (4K@60Hz with active Filter technology). A dedicated integrated circuit is used that has been developed to provide uncompressed Ultra HD 4K@60Hz and HDR. There is no need for an external power supply.

Ref. HD-E-2	0.75 m	1.50 m	3.00 m	5.00 m	Ø 7.5 mm
Ref. HD-E-2	7.50 m				Ø 9.5 mm
Ref. HD-E-2	10.00 m	12.00 m	15.00 m	20.00 m	Ø 10.5 mm



Pictures may differ from actual products

HD-E-48 HDMI™

Câble HDMI e-ARC

NEW



Compliant with the oxygen-free copper HDMI 2.1 cable with metal connector. Supports 48 Gbps OR. 4K @120Hz 8K@60Hz RGB/4:4:4, eARC.

The HD E 48 offers ultra-high-speed data transfer, supporting resolutions up to 8K and refresh rates of up to 120 Hz for a smooth visual experience.

It ensures compatibility with the latest devices and technologies, offering enhanced audio and video quality for :

- Professional
- Streaming
- Gaming

Ref. HD-E-48	1,00 m	2,00 m	3,00 m
--------------	--------	--------	--------



Pictures may differ from actual products

HD-E-C

C type HDMI cable



Tin-plated and 99.99% oxygen free copper (OFC) conductors, double shielding, molded plugs, gold contacts, 1 male HDMI plug / 1 mini male HDMI plug.

Excellent performance in Full HD and in 3D. Ideal cable to meet the needs of portable HD devices (camcorders, cameras, tablets, etc.).

Ref. HD-E-C	2.00 m
-------------	--------



Pictures may differ from actual products

Recommended for high definition audio and video connections: DVD player, Blu-ray player, DVD recorder, digital TV decoder, flat screen, video projector, game console, home theater amplifier, etc.

HD-OPTIC 4K

HDMI optical CABLE e-ARC



Compliant with HDMI 2.1 AOC Cable with metal connector. Gold support 48 Gbps. 4K @120Hz 8K @60 Hz RGB/ 4:4:4. eARC

Optical transmission of high-frequency signal without electromagnetic interference. HDMI cable with professional fiber optic technology. This technology enables data rates of up to 18 Gbps over a transmission distance of up to 150 m. It therefore supports high-resolution 4K formats at 50 or 60 Hz and is the ideal solution for connecting devices with an HDMI 2.0 interface over long distances.

Ref. HD-OPTIC 4K | 10.00 m | 15.00 m | 20.00 m | 25.00 m | 30.00 m
Ref. HD-OPTIC 4K | 40.00 m | 50.00 m | 75.00 m | 100 m | 150 m




Pictures may differ from actual products

HD-OPTIC 8K

HDMI opticae-ARC

NEW

Ref. HD-OPTIC 8K | 5.00 m | 7.50 m | 10.00 m | 20.00 m

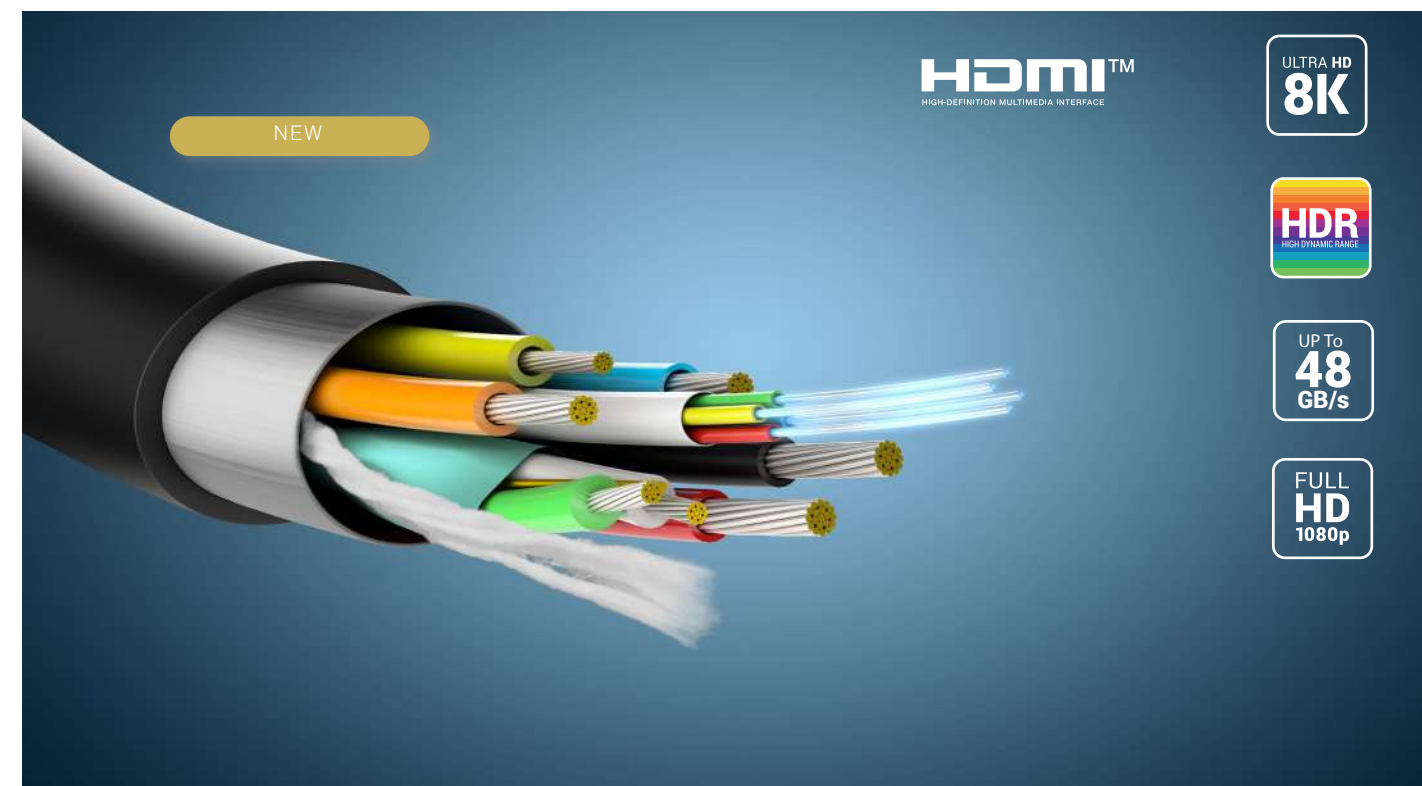

NEW

HDMITM
HIGH-DEFINITION MULTIMEDIA INTERFACE

ULTRA HD
8K

HDR
HIGH DYNAMIC RANGE

UP To
48
GB/s

FULL
HD
1080p

Recommended for high definition audio and video connections: DVD player, Blu-ray player, DVD recorder, digital TV decoder, flat screen, video projector, game console, home theater amplifier, etc.

HDMI MPO

NEW

HDMI 2.1 Fiber Optic Kit - Ultra High Performance



Enjoy an 8K UHD (Ultra High Definition) transmission with no signal loss or latency over distances of up to 500m, thanks to HDMI 2.1 technology and high-purity OM3* fiber optic.

Contents of the kit :

- 1 MPO-MPO optical cable (OM3*) with LSZH shielded inner sheath, customizable length
- 1 pair of MPO-HDMI 2.1 optical connector cables (TX+RX, 1 meter each)
- 1 pair of MPO couplers
- 1 pair of Keystone jacks for the installation of MPO couplers



Pictures may differ from actual products

Ref. HDMI MPO | 5.00 m | 10.00 m | 15.00 m | 20.00 m

TECHNOLOGY & PERFORMANCE signed by REAL CABLE

You benefit from the REAL CABLE expertise serving your image. Innovation is at the heart of our cables.

Maximum performance :

Designed with a pure OM3 optical core, this cable significantly reduces transmission losses. It eliminates interference and radiation issues, even when carrying very high frequency signals.

Installation without constraint :

No specific direction is required between the source and the screen.

Evolving technology - Prepare for the future :

Thanks to a fiber optic design providing bandwidth of up to 600Gbps, the solution is scalable. By simply replacing the MPO-HDMI connectors, you can upgrade to a higher HDMI version, such as HDMI 2.1 or beyond.

8K UHD & HDR unmatched image quality :

Enjoy an 8K Ultra HD resolution, with 4:4:4 color sampling and a refresh rate of up to 60 frames per second. Compatible with the most advanced HDR formats: Dolby Vision, HDR10+... for exceptional color depth and contrast.

Recommended for high definition audio and video connections : DVD players, Blu-ray players, DVD recorders, digital TV decoders, flat TVs, video projectors, video game consoles, Home Theater amplifiers, etc.



ZOOM

HD-ULTRA-2 HDMI™

Ultra flat HDMI cable



Tin-plated Nanotech® conductors, ultra-flat cable, double shielding, metal plugs, gold contacts, many available lengths, 1 male HDMI plug / 1 male HDMI plug.

Excellent performance in Full HD, Ultra HD in 3D and 4K. Connection Very High Speed optimized by the spacing of data channels, which are no longer concentric, but side by side. Very flexible flat cable and very compact plugs facilitate connections to flat screens, without any compromise on quality.

From 3.00 m : Active HDMI (4K@60Hz with active Filter technology). A dedicated integrated circuit is used that has been developed to provide uncompressed Ultra HD 4K@60Hz and HDR. There is no need for an external power supply.

Ref. HD-ULTRA-2 | 0.75 m | 1.00 m | 1.50 m | 2.00 m | 3.00 m (H) 2 x (L) 7.2 mm



Recommended for high definition audio and video connections : DVD players, Blu-ray players, DVD recorders, digital TV decoders, flat TVs, video projectors, video game consoles, Home Theater amplifiers, etc.



ZOOM

INFINITE III HDMI™

HDMI cable with SafeLock II® system



Tin-plated and 99.99% oxygen free copper (OFC) conductors, very strong section cable, triple shielding, SafeLock® metallic plugs, gold contacts, many available lengths, 1 male HDMI plug / 1 male HDMI plug.

An anti-vibration nylon braid, a braiding of high-density mass, high power twisted pairs ensure excellent transmission quality to achieve a record bitrate of **20.4 Gb/s**. New SafeLock® metallic plugs for a secure connection using screws and perfect durability, featuring a wide compatibility with audio-video devices with the new top or side hook. Everything is brought together to provide the best HDMI connection, and ensure superb picture quality whether in Full HD, in 3D or even in 4K. The sound is not to be outdone with remarkable precision, in Dolby® TrueHD, in DTS-HD™, DTS-X, Dolby Atmos and even in LPCM (uncompressed sound).

Ref. INFINITE III | 1.50 m | 3.00 m | 5.00 m | 7.50 m | 10.00 m | 12.00 m | 15.00 m Ø 11 mm

MASTER



HDMI

HDMI accessories

From wallplates to various HDMI adapters, many suitable solutions are available. All presented accessories support the last HDMI current standards, except if it is clearly notified. At least, to share different sources (Blu-ray, DVD, HDTV decoder, game consoles, etc.) or connect several displays (flat TV, video projector, etc.), different kinds of HDMI switches, dispatchers or splitters are available.

ELECTROMECHANICAL SWITCHES

ELECTRONIC SWITCHES

HDMI DISPATCHERS / ADAPTERS

electromechanical switches

Recommended for switching multiple HDMI sources to a flat TV or high definition video projector.

HD-21SM

2 inputs to 1 output HDMI switch



- Technical specifications
- > Inputs : 2 x female HDMI plug (A type)
 - > Output : 1 x female HDMI plug (A type)
 - > High efficiency electromecanical switch
 - > Selected input indicated by a LED
 - > Self powered (no power supply needed & no power consumption)
 - > Gold contacts
 - > HDCP, Deep Color, x.v.Color™, auto Lipsync, CEC and ARC (Audio Return Channel)
 - > Video : up to 1 080p (24, 50 and 60 Hz)
 - > 3D video : 1 080p sequential, 1 080p Top-Bottom and 1 080p Side-by-Side
 - > Audio : LPCM 7.1, Dolby® TrueHD and DTS™HD
 - > Maximum HDMI interconnection : 5 m between input & output
 - > Weight : 170 g
 - > Dimensions (L x D x H) : 127 x 130 x 32 mm



HD-31SM

3 inputs to 1 output HDMI switch



- Technical specifications
- > Inputs : 3 x female HDMI plug (A type)
 - > Output : 1 x female HDMI plug (A type)
 - > High efficiency electromecanical switch
 - > Selected input indicated by a LED
 - > Self powered (no power supply needed & no power consumption)
 - > Gold contacts
 - > HDCP, Deep Color, x.v.Color™, auto Lipsync, CEC and ARC (Audio Return Channel)
 - > Video : up to 1 080p (24, 50 and 60 Hz)
 - > 3D video : 1 080p sequential, 1 080p Top-Bottom and 1 080p Side-by-Side
 - > Audio : LPCM 7.1, Dolby® TrueHD and DTS™HD
 - > Maximum HDMI interconnection : 5 m between input & output
 - > Weight : 200 g
 - > Dimensions (L x D x H) : 127 x 130 x 32 mm



Recommended for switching multiple HDMI sources to one display (flat TV or high definition video projector).

HDS-61

HDMI switch with CEC functions



Technical specifications

- > Inputs : 6 x female HDMI plug (A type) with SafeLock® system
- > Output : 1 x female HDMI plug (A type) with SafeLock® system
- > Professional metal case (better EMI/RFI protection)
- > High efficiency electronic switch
- > Selected input indicated by a LED
- > External 5 V DC power supply (no electric interference)
- > Remote control
- > Gold contacts
- > CEC functions supported : routing change, one touch play, stand by, pass through CEC commands
- > Video : up to 1 080p (24, 50 and 60 Hz), 12- Bit Deep Color HD TV
- > 3D video : 1 080p sequential, 1 080p Top-Bottom and 1 080p Side-by-Side
- > Audio : Dolby® TrueHD lossless compressed digital audio compliant and DTS™ HD



> Dimensions (L x D x H) : 200 x 104 x 26 mm

HDS-12-4K

HDMI dispatcher 1 input to 2 outputs (simultaneous)

Technical specifications

- > Input : 1 x female HDMI plug (A type)
- > Outputs : 2 x female HDMI plug (A type)
- > Professional metal case (better EMI/RFI protection)
- > High efficiency electronic switch
- > Output indicated by a LED
- > External 5 V DC power supply (no electric interference)
- > Gold contacts
- > HDCP 2.2 and HDCP 1.4, HDR, Deep Color, x.v.Color™, auto Lipsync and CEC
- > Video : ultra HD (4K) and 1 080p (24, 50 and 60 Hz)
- > 3D video : 1 080p sequential, 1 080p Top-Bottom and 1 080p Side-by-Side
- > Audio : PCM, LPCM 7.1, Dolby Digital, Dolby Digital Plus, Dolby® TrueHD, DTS 96/24 and DTS™ HD
- > Maximum HDMI interconnection : 30 m between input & output (**integrated booster**)
- > Weight : 160 g
- > Dimensions (L x D x H) : 115 x 55 x 20 mm



FRONT

BACK

Pictures may differ from actual products

Recommended for dispatching one or more HDMI sources to two displays (flat TV or high definition video projector).

HDWL-11- 4K

HDMI splitter 1 input to 2 outputs (simultaneous)



Spécifications techniques

- > Entrée : 1 x fiche femelle HDMI (type A)
- > Sorties : 2 x fiches femelles HDMI (type A)
- > Boîtier métallique professionnel (meilleure protection EMI / RFI)
- > Interrupteur électronique à haute efficacité
- > Sortie indiquée par une LED
- > Alimentation externe 5 V CC (pas d'interférence électrique)
- > Contacts or
- > HDCP 2.2 et HDCP 1.4, HDR, Deep Color, x.v.Color™, auto Lipsync et CEC
- > Video : ultra HD (4K) et 1 080p (24, 50 et 60 Hz)
- > Vidéo 3D: 1 080p séquentiel, 1 080p Top-Bottom et 1 080p Side-by-Side
- > Audio : PCM, LPCM 7.1, Dolby Digital, Dolby Digital Plus, Dolby® TrueHD, DTS 96/24 et DTS™ HD
- > Interconnexion HDMI maximale: 30 m entre entrée et sortie (amplificateur intégré)
- > Poids: 160 g
- > Dimensions (L x D x H) : 115 x 55 x 20 mm



PRO-HDCASE

On measure HDMI cable kit

For some specific applications, the preassembled cables are unsuitable. The HDMI on-measure version by Real Cable allows to slip a naked cable in an electrical sleeve, to crimp the HDMI plugs to each extremity, without any soldering, or complicated tooling. A cable tester is provided in order to check the successful installation.

The toolbox PRO-CASE contains all the needed to assemble an on-measure cable. A crimping tool, a cable tester, crimping holders, a guidebook and 20 HDMI plugs are provided. The cable assembling take only several minutes. The HDMI cable jacket has to be unwrapped. Then, the cables have to be inserted into the cable holders according to the color codes, and the crimping tool should be used to connect everything together. Finally, the 2 caps have to be screwed on the plug.



Speaker

speaker cables

An acoustic loudspeaker needs an amplifier capable of providing it with enough power for its speakers to work and to generate various sound frequencies (bass, midrange and treble). In addition, the connection between the amplifier and the speaker is done only through a speaker cable. Therefore the latter must not be neglected if you want to get the best of your system. A simple power cord is only endowed for the transport of mains. A speaker cable for its part must work at the lowest as well as at the highest frequencies. So It is not a simple copper wire. The speaker cable should be adjusted in section to the power delivered by the amplifier (high power = strong section), and be the least resistant to low as well as high frequencies so as not to alter the sound. It is the same quality of the strands that dictates the behavior of a speaker cable. It is therefore important to choose the most suitable cable for installation. Real Cable offers a wide range to do this, able to satisfy the most diverse needs.

SPI VIM OFC

SPEAKER CABLE INTEGRATION OFC



COMING

RealCable/PRO®



99.99% deoxidized copper conductors (OFC), very practical as a single cable includes 2 or 4 conductors to facilitate its implementation and installation.

Special Integration.

Ref. SPI VIM OFC 220 | 2 x 2.00 mm² | 153 m

Ref. SPI VIM OFC 425 | 4 x 2.50 mm² | 153 m

SPI VIM OFC T

SPEAKER CABLE OFC TO BE BURIED



COMING

RealCable/PRO®



SPI VIM OFC T is a OFC speaker cable designed for installation, featuring a PE outer sheath that is resistant to water and UV.

Special Integration.

Ref. SPI VIM OFC T | 2.20 mm² | 305 m

Recommended for audio connections between an amplifier and loudspeakers.

CAT

High quality speaker cable



99.99% oxygen free copper (OFC) conductors, fine strands, single braiding, many available sections, easy identification (two-tone cable).

Excellent value for money.

Ref. CAT075020 | 0.75 mm² | 500 m | 10 m | 15 m

Ref. CAT100020 | 1.00 mm² | 400 m | 30 m

Ref. CAT150020 | 1.50 mm² | 300 m | 30 m | 10 m | 15 m

Ref. CAT200015 | 2.00 mm² | 200 m

Ref. CAT250015 | 2.50 mm² | 100 m | 10 m

LC

High quality speaker cable



99.99% oxygen free copper (OFC) conductors, fine strands, braiding in 7 groups, several available sections, low capacitive effect due to the spacing between both conductors.

Very good definition in the trebles.

Ref. LC150012 | 1.50 mm² | 100 m

Ref. LC250012 | 2.50 mm² | 100 m | 1000 m

PRO10

Very high quality speaker cable



TRANSPARENT



BLACK



WHITE

99.99% oxygen free copper (OFC) conductors, very fine strands, braiding in 7 groups, many available sections, very flexible transparent sheathing.

Very balanced and defined sound.

Ref. P160T | 1.60 mm² | 200 m | 30 m

Ref. P200T | 2.00 mm² | 200 m

Ref. P264T | 2.64 mm² | 150 m

Ref. P330T | 3.30 mm² | 100 m

Ref. P400T | 4.00 mm² | 100 m

Ref. P160B | 1.60 mm² | 200 m

Ref. P200B | 2.00 mm² | 200 m

Ref. P330B | 3.30 mm² | 100 m

ABOUT SECTION

Technically the more the section is, the less the loss between amplifier and speakers are. Also the more the length of cable is, the more the loss are. Practically the compromise between loss, size of cable and budget is around 2.5 mm². This is generally enough up to 5 m between amplifier and loudspeakers. When no compromise can be accepted, the biggest section will always tends to better results.

Recommended for audio connections between an amplifier and loudspeakers.

FLAT LINE

Very high quality speaker cable



99.99% oxygen free copper (OFC) conductors, very fine strands, true flat braiding, several available sections, very flexible transparent sheathing. Very balanced and defined sound, with an improved sound stage.

Ref. FL250T 2.50 mm² 150 m	Ref. FL250F 2.50 mm² 150 m	Ref. FL250B 2.50 mm² 150 m
Ref. FL400T 4.00 mm² 50 m	Ref. FL400F 4.00 mm² 50 m	Ref. FL400B 4.00 mm² 50 m

CBV

High fidelity speaker cable



ZOOM

99.99% oxygen free copper (OFC) conductors, very fine strands, HSCC (High Spec Copper Conductor) braiding, progressive double insulation (PP insulation gradient), several available sections, flexible white sheathing. Locating by sheathing's shape. Available in assembled version with multi contacts banana plugs.

Very dynamic and fluid sound, with a very homogeneous sound image and above all a more precise bass thanks to HSCC.

Ref. CBV130016 60 m
Ref. CBV130016/3M 2 x 3 m assembled cable
Made to measure cable, on request

HSCC TECHNOLOGY

HSCC (High Spec Copper Conductor) technology is based on deoxygenated copper conductors on which a specific insulating sheath that is rather rigid (PP or polypropylene) is injected at high pressure under vacuum. The strands are then clasped in an extremely tight manner, thus reducing the gaps to optimize conductivity and gain in dynamics as well as in sound stage. Finally, combined with the outer sheathing, this inner sheathing with special dielectric properties creates a progressive double insulation (PP insulation gradient) that removes any potentially harmful influence from the external environment.

Recommended for audio connections between an amplifier and loudspeakers.

TDC

Very high fidelity speaker cable



ZOOM

99.99% oxygen free copper (OFC) conductors, strands in 2 different sections (TDC), braiding in 7 groups (1 multi strand group for the bass and 6 groups of small strands for the midrange-treble), low capacitive effect due to the spacing between both conductors, many available sections, smoked sheathing.

The plans are perfectly spaced and the lateral opening impressive. The bass is very deep and dynamic, the treble perfectly defined.

Ref. TDC200F 2.00 mm² 100 m
Ref. TDC300F 3.00 mm² 100 m
Ref. TDC500F 5.00 mm² 50 m

Also available in assembled cable with B7210 plugs. Monoblock Contact Or 24K

Ref. ELITE 300 3.00 mm² 2 x 2 m 2 x 3 m 2 x 5 m
Ref. ELITE 500 5.00 mm² 2 x 2 m 2 x 3 m 2 x 5 m

BM

Very high fidelity speaker cable



ZOOM

99.99% oxygen free copper (OFC) and silver (SPC) conductors, strands in 2 different sections (TDC), braiding in 7 groups (1 multi strand group for the bass, 4 groups of small strands for the midrange and 2 groups of small silver strands for the treble), low capacitive effect due to the spacing between both conductors, many available sections, transparent sheathing.

The plans are perfectly spaced and the lateral opening impressive. The bass is very deep and dynamic. Thanks to the silver, the midranges and trebles gain in precision and accuracy.

Ref. BM150T 1.50 mm² 100 m
Ref. BM250T 2.50 mm² 100 m
Ref. BM400T 4.00 mm² 50 m
Ref. BM600T 6.00 mm² 50 m

Also available in assembled cable with plugs B7210 Monoblock Contact Or 24K

Ref. PRESTIGE 400 4.00 mm² 2 x 2 m 2 x 3 m 2 x 5 m
Ref. PRESTIGE 600 6.00 mm² 2 x 2 m 2 x 3 m 2 x 5 m

Recommended for audio connections between an amplifier and loudspeakers.

3D-TDC


Very high fidelity speaker cable



99.99% oxygen free copper (OFC) conductors, strands in 3 different sections (TDC), HSCC (High Spec Copper Conductor) braiding in three separate conductors for each channel (1 large mono strand for the bass, 2 mono strands for the midrange and 5 strands of smaller section for the treble), progressive double insulation (PP insulation gradient), anti-vibration plant dielectric, round outer sheathing.

The combination of TDC and HSCC ensures impressive power combined with a smooth recovery and a remarkably layered and spaced sound image. In addition, a superb high-frequency definition, a perfectly mastered midrange and a dynamic bass.

Ref. 3D-TDC | 20 m (with grey external jacket)
Ref. 3D-TDC/3M | 2 x 3 m | assembled cable (with braided external jacket)
Made to measure cable, on request

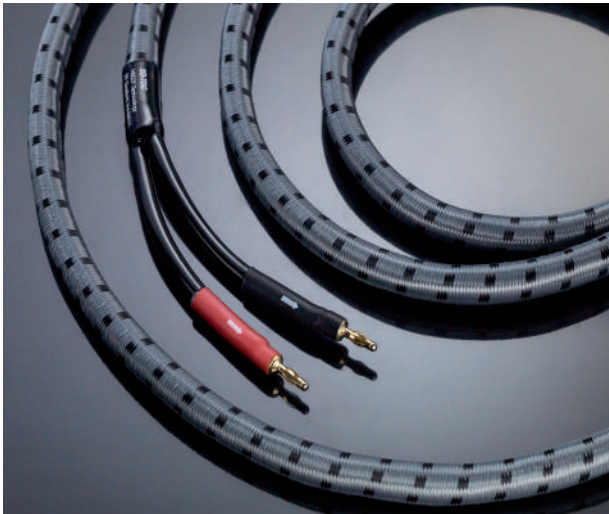

ZOOM



BWOFC

Very high fidelity speaker cable



99.99% oxygen free copper (OFC) conductors, strands in 2 different sections (TDC), optimized for bi-wiring and bi-amplification in 2 separate conductors for each channel (1 multi strand braid for the bass and 1 braiding in 7 groups of small strands for the midrange-treble), insulation of the conductors with "Hollow tubes" (anti-vibration and low capacitive effect), round outer sheath for easier stripping.

The combination of TDC and bi-wiring brings very deep and dynamic bass, combined with an excellent sound image and a large side opening. The presence and definition of the midrange-treble register (voice, instruments, etc..) is also enhanced.

Ref. BWOFC250R | 50 m
Ref. BWOFC400R | 30 m
Ref. BWOFC250R/3M | 2 x 3 m | assembled cable (banana or BFA optional plugs)
Ref. BWOFC400R/3M | 2 x 3 m | assembled cable (splitters + banana plugs)
Made to measure cable, on request



Example of bi-wiring combination with optional BFA plugs on BWOFC250.

ZOOM




Recommended for audio connections between an amplifier and loudspeakers.



The combination of the best Real Cable® technologies for audio transmission without compromise. The TDC is here pushed to its climax with the use of 6 different conductors. Each frequency type has its dedicated channel without disturbing the others. In order to perfect the transparency and enable the strong currents of low frequencies to pass with minimum losses, the dedicated channel is made of OCC copper. In the same vein, the channel dedicated to treble is made of silver for linear recovery up to the very high frequencies to meet the new sound formats in studio quality (LPCM 192 kHz/24-bit and Flac 96 kHz/24-bit). Each conductor is designed to have the same impedance with strands of different sections. This combination ensures consistency, balance and transparency. As a bonus, the groups of positive and negative conductors are separated by air through the "Hollow tube" to minimize the capacitive effect and twisted to reduce linear inductance. The acoustic loudspeakers thus work without elements of interference between the amplifier and internal filters. Result, the lesser details are fully retranscribed. The sound in its entirety is a surprising richness. The sound image is well spaced and overall, very broad. The bass reaches a remarkable quality and definition. The midrange gains in fineness and range. Finally the treble is airy, precise and very fine.

ZOOM

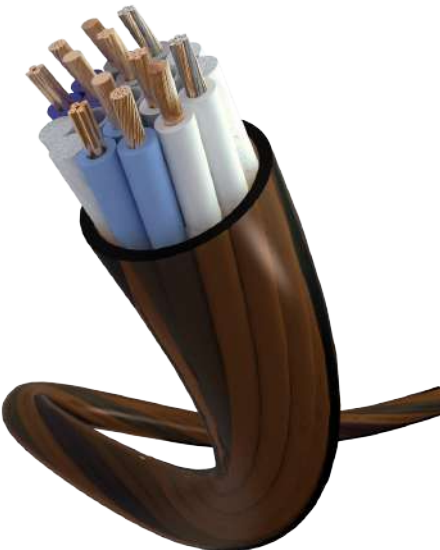

HD-TDC

Prestigious speaker cable



Tri-metal conductors made of oxygen free copper (OFC), silver (SPC) and highly deoxygenated copper (OCC), strands in 6 different sections (TDC), braiding in 6 separate conductors for each channel (4 large OCC mono strands for the bass, 12 OFC mono strands for the high bass, 32 OFC multi strands for mid-bass, 65 OFC multi strands for the midrange, 1 braiding in 7 groups of very fine OFC strands for the high-midrange and 1 braiding in 7 groups of very fine silver strands for the treble), optimized for bi-wiring and tri-wiring, Quasi-Litz-type manufacturing, twisted conductors (reduction of the linear inductance), insulation of conductors with "Hollow tubes" (anti-vibration and capacitive effect reduced), smoked round outer sheathing.

Ref. HDTDCOCC600 | 30 m
Ref. HDTDCOCC600/3M | 2 x 3 m | assembled cable (splitters + plugs)
Made to measure cable, on request

MASTER

Master by Real Cabke

MASTER



MASTER BY REAL CABLE
OUR STRENGTHS

The limited edition of the cables series CHEVERNY, CHENONCEAU, VENDÔME, CHAMBORD are developed and assembled by hand in France with the greatest care.

These specific models are accompanied by an authenticity certificate, including a manufacturing number, thanks to which the product can be followed although its life.



This range assembled in France, benefit also of the life-time REAL CABLE warranty.



The advantage of this operation is to control entirely the product from its design till its manufacturing. The important guarantee of quality and identify know-how wich distinguish particulary REAL CABLE.

Patrice Lemaire

Recommended for audio connections between an amplifier or a preamplifier and an active subwoofer.



CHEVERNY SPEAKER

Very High Fidelity Speaker Cable - Assembled in France



Cheverny Speaker has 4 distinct tubular conductors, highly deoxygenated (OFC), within a natural plant dialectical anti vibration. Its outer diameter is 14,5 mm. The dielectric coton is the only insulator (affordable) in symbiosis with air and micro loads. The copper strands textures influence the sonic character.

The thick strand make the sound more nervous, mor punchy treble, bass frank. The finer strands will give a softer sound with shimmering treble and bass rounder. Good insulation and optimum shielding have several reasons to be : protect external magnetic fields, limit losses of the signal on the cable length, insulation to air and moisture to prevent oxydation, absoprtion of vibration of the electric field. The main feature of a quality cable is based on the reproduced sound and neutrality.

Ref. CHEVERNY-SPEAKER | 2 x 3 m
Made to measure cable, on request

MASTER

Recommended for audio connections between an amplifier or a preamplifier and an active subwoofer.



**VENDÔME
MASTER
ASSEMBLED IN
FRANCE**

After spending long months researching using different materials and internal structures, we chose an internal tubular conception with silver conductors for different sections (ultra-thin strands for the periphery associated to conductors similar to Litz wire at the heart of the cables.

Technology speaking, when listening to any recording, this perfect geometry gave us a surprising result going beyond our theoretical expectations.

Vendôme is able to give the highest harmonics without any aggressiveness and without raising the high middle register of your Hi-Fi system.



VENDÔME SPEAKER

Very High Fidelity Speaker Cable - Assembled in France



Developped by Real Cable® engineers, Vendôme SP has been made using an internal tubular with silver conductors for different sections (ultra-thin strands for the periphery associated to conductors similar to Litz wire at the heart of the cable). The work conducted on the -extremely light- resistance of this cable gave to our power amp some additional capacity to "absorb" our speakers static movements when they were set on specific frequency slots : when listening one can clearly notice extremely well-defined bass sounds without any training noise in the back. Then we have associated PURE SILVER conductors for different sections.

The use of this noble material with exceptional qualities and the internal layout of the strands from the different sections going through isolated conductors initially allowed us to fight the sometimes anarchical signal transmission while improving transmission speed. Vendôme is perfectly linear on all the useful pass-band.

Ref. VENDOME-SPEAKER | 2 x 3 m | Ø 9 mm
Made to measure cable, on request

MASTER

Recommended for audio connections between an amplifier and loudspeakers.



**CHAMBORD
MASTER
ASSEMBLED IN
FRANCE**

Real Cable® Chambord Speaker cable is able to highlight any type of recording in the slightest details through your top-end speakers and electronics.

Chambord Speaker delete sound effects memory which can be detected in some strong section cables. Chambord brings a richness of information which has hardly been reached. Sound message is clear, understandable and natural.

When listening, the slightest details are being perfectly transposed.

The whole sound is surprisingly rich.



CHAMBORD II SPEAKER

Very High Fidelity Speaker Cable - Assembled in France



Developped by Real Cable® engineers, Chambord II SP will make you discover a new sound of your HIFI system. This cable has a technology often used by Real Cable for High End Cables : HOLLOW TUBE Technology. Indeed, classic insulating materials can sometimes bring colorations or a capacitive effect. Using HOLLOW TUBE by separating each driver allowed us to reduce the capacitive effect.

Chambord II SP removes the lack of transparency that can appear in some cables of strong section while bringing a rich detail rarely achieved. The sound message is clear, intelligible and natural.

The copper strands associated with the Hallow Tube and the semi-rigid structure of this cable with its shielding protection gives a unique sound. Chambord SP II is assembled by hand, with removable plugs : multi point contact bananas and 24K Gold contact plated forks.

Ref. CHAMBORD II SPEAKER | 2 x 2 m | 2 x 2 m50 | 2 x 3m00 | Ø 12 mm



CHAMBORD II SP ★★★★★

DIAPASON FRANCE

"Bright and clear sound image attesting to the recent and tangible progress of the brand. Reactive dynamics, always strongly conducted. The whole is really nice"

ITEM

Audio

audio cables

Essential links in the chain of sound transmission, the audio connection cables must not be neglected to offer the best possible quality and make the most of the devices. The audio cables developed by Real Cable® are offered under five broad categories, each of which are declined various models capable of satisfying the most diverse needs.

- SUBWOOFER CABLES
- STEREO RCA CABLES
- XLR / EBU CABLES
- DIGITAL CABLES
- OPTICAL CABLES

E-SUB-2

Very high quality subwoofer cable



99.99% oxygen free copper (OFC) conductors, strong section cable, double shielding, metallic plugs, gold contacts, hand soldered, many available lengths, 1 male RCA plug / 1 male RCA plug.

Rich and defined bass.

Ref. E-SUB | 2.00 m | 3.00 m | 5.00 m | 7.50 m | 10.00 m
Ref. E-SUB -2 | 100 m in SPOOL

NEW



Pictures may differ from actual products

Recommended for audio connections between an amplifier or a preamplifier and an active subwoofer.

NANO-SUB

Audio cable subwoofer



99.99% oxygen free copper (OFC) conductors, strong section cable, double shielding, metallic plugs, gold contacts, many available lengths, 1 male RCA plug / 1 male RCA plugs.

Rich and defined bass. Specially dedicated to the integration.

Ref. NANO-SUB | 2.00 m | 3.00 m | 5.00 m | 7.50 m | 10.00 m | Ø 2.25 mm



SUB1801

Very high fidelity subwoofer cable



99.99% oxygen free copper and silver (SPC) conductors, strands in 2 different sections (TDC), very strong section cable, triple shielding, metallic monoblock plugs with TwistLock®, gold contacts, hand soldered, many available lengths, 1 male straight RCA plug / 1 male angled RCA plug.

The bass is very deep and dynamic. With TDC, the bass height remains precise and defined, while maintaining a great ease in the sub-bass and without damage during attacks in the bass. The TwistLock® plugs ensure a reliable and durable connection.

Ref. SUB1801 | 2.00 m | 3.00 m | 5.00 m | 7.50 m | Ø 9 mm



ZOOM



Pictures may differ from actual products

Recommended for audio connections between an amplifier or a preamplifier and an active subwoofer.



ZOOM

REFLEX

Prestigious subwoofer cable



Very high quality 99.99% oxygen free copper (OFC) conductors, strands in 2 different sections (TDC), very strong section cable, quadruple shielding, metallic monoblock plugs with TwistLock®, Rhodium contacts, hand soldered, many available lengths, 1 male RCA plug / 1 male RCA plug.

An anti-vibration nylon braid, a braiding of high-density mass, an aluminum strip, double FPE insulator for low capacitive effect and the use of ferrites ensure a foolproof insulation of the signal being transported. TwistLock® plugs made of Rhodium, a silvery white metal known for its hardness greater than gold since it belongs to the platinum metals group, for excellent corrosion resistance and perfect durability. Everything is brought together to provide the best connection for the subwoofer, which, thanks to the TDC, provides a very rich and detailed bass height, with a good foundation in the sub-bass and an excellent dynamic in the bass.

Ref. REFLEX | 2.00 m | 3.00 m | 5.00 m | Ø 10 mm.

Made to measure cable, on request



Recommended for audio connections between an amplifier or a preamplifier and an active subwoofer.



CHEVERNY
SUBWOOFER
MASTER

The MASTER Edition of cables series CHEVERNY is assembled by hand in France with the greatest care. They offer the best connection. These specifics models are accompanied by an authenticity certificate, including a manufacturing number, thanks to which the product can be followed although its life. These cables assembled in France benefit also of the life-time REAL CABLE warranty.

Cheverny Subwoofer is recommended for the audio links between amplifiers or preamplifiers and active subwoofer.



CHEVERNY II-SUB

Prestigious subwoofer cable assembled in France



Very high quality and highly deoxygenated copper (OCC) conductors, strands in 2 different sections (TDC), very strong section cable, double shielding and asymmetrical shielding, metallic monoblock plugs, gold contacts, hand soldered, 1 male RCA plug / 1 male RCA plug, assembled in France cable.

An antivibration nylon braiding and a high density braiding of the mass provide a very good isolation of the transported signal. Very flexible round cable. Monoblock plugs for a perfect holding throughout the time. Everything is gathered in order to offer an excellent subwoofer link. It delivers a very rich sound message, with a powerful infrabass and a dynamic bass, thanks to the OCC copper conductors, with TDC technology.

Ref. CHEVERNY II-SUB | 1.00 m

Made to measure cable, on request

MASTER

Recommended for stereo audio connections between an amplifier or a preamplifier and a turntable, a CD/SACD player, an FM tuner, etc.

ECA - 2

Very high quality audio stereo cable



99.99% oxygen free copper (OFC) conductors, strong section cable, double shielding, metallic plugs, gold contacts, many available lengths, 2 male RCA plugs / 2 male RCA plugs.

Very balanced and defined sound.

Ref. ECA-2 | 0.75 m | 1.00 m | 2.00 m | Ø 7 mm



Pictures may differ from actual products

CA 1801

High fidelity audio stereo cable



99.99% oxygen free copper and silver (SPC) conductors, strands in 2 different sections (TDC), very strong section cable, triple shielding, metallic monoblock plugs with Twistlock®, gold contacts, many available lengths, 2 male RCA plugs / 2 male RCA plugs.

Plans are perfectly spaced and the lateral opening impressive. The bass is very deep and dynamic. With the silver, the midranges and trebles gain in precision and fineness. Twistlock® plugs ensure a reliable and durable connection.

Ref. CA1801 | 0.50 m | 0.75 m | 1.00 m | 1.50 m | Ø 9 mm



Pictures may differ from actual products

ZOOM



Recommended for stereo audio connections between an amplifier or a preamplifier and a turntable, a CD/SACD player, an FM tuner, etc.



An anti-vibration nylon braid, a braiding of high-density mass, an aluminum strip, double FPE insulator for low capacitive effect and the use of ferrites ensure a foolproof insulation of the signal being transported. Twistlock® plugs made of Rhodium, a silvery white metal known for its hardness greater than gold since it belongs to the platinum metals group, for excellent corrosion resistance and perfect durability. Everything is brought together to provide an excellent stereo audio connection, which, thanks to the TDC, provides a clear, intelligible and natural sound message. The bass gains in depth and dynamics. The midrange is remarkably open and precise. The treble is very defined and finally the sound image offers an incredible openness.

CA REFLEX

Prestigious audio stereo cable



Very high quality and highly deoxygenated copper (OFC) conductors, strands in 2 different sections (TDC), very strong section cable, quadruple shielding, metallic monoblock plugs with Twistlock®, Rhodium contacts, many available lengths, 2 male RCA plugs / 2 male RCA plugs.

Ref. CA-REFLEX | 0.75 m | 1.00 m | Ø 10 mm

Made to measure cable, on request

ZOOM



Recommended for stereo audio connections between an amplifier or a preamplifier and a turntable, a CD/SACD player, an FM tuner, etc.



CHEVERNY RCA MASTER ASSEMBLED IN FRANCE

The MASTER Edition of cables series CHEVERNY is assembled by hand in France with the greatest care. They offer the best connection.

These specifics models are accompanied by an authenticity certificate, including a manufacturing number, thanks to which the product can be followed although its life.

These cables assembled in France benefit also of the life-time REAL CABLE warranty.

Cheverny RCA is recommended for audio stereo links between amplifiers, preamplifiers, turntables, CD/SACD players etc...



CHEVERNY II-RCA

Prestigious audio stereo cable assembled in France



Very high quality and highly deoxygenated copper (OCC) conductors, strands in 2 different sections (TDC), very strong section cable, double shielding and asymmetrical shielding, metallic monoblock plugs, gold contacts, hand soldered, 2 male RCA plug / 2 male RCA plug, assembled in France.

An antivibration nylon braiding and a high density of the asymmetrical braiding of the mass provide a very good isolation of the transported signal. Monoblock plugs for a perfect holding throughout the time. Everything is gathered in order to offer an excellent audio stereo link. It delivers a very well-balanced and natural sound message thanks to the OCC copper conductors, with TDC technology. The bass is deeper and more dynamic. The medium is rich and the sharp accurate. Finally, the sound image ensures a wide opening.

Ref. CHEVERNY II-RCA | 1.00 m Ø 9 mm
Made to measure cable, on request

MASTER

Recommended for audio connections between an amplifier or a preamplifier and an active subwoofer.



CHENONCEAU RCA MASTER

The MASTER Edition of cables series CHENONCEAU is assembled by hand in France with the greatest care. They offer the best connection.

These specifics models are accompanied by an authenticity certificate, including a manufacturing number, thanks to which the product can be followed although its life.

These cables assembled in France benefit also of the life-time REAL CABLE warranty.



CHENONCEAU-RCA

Prestigious audio stereo cable assembled in France



Very high quality and highly deoxygenated silver (OFC) conductors, 2 separated conductors (1 mono strands for « plus », 1 mono strands for « minus »), twisted conductors (decrease of the linear inductance), very strong section cable, insulation of conductors with «Hollow tubes» (anti-vibration and capacitive effect reduced), metallic monoblock plugs with TwistLock®, gold contacts, hand soldered, 2 male RCA plug / 2 male RCA plug, assembled in France.

An antivibration nylon braiding and a high density braiding of the mass, an aluminum strip, a double isolating PTFE and Hollow Tubes of low capacitive effect, provide a foolproof isolation of the transported signal. Solid TwistLock® plugs for a perfect holding throughout the time. Everything is gathered in order to offer a very detailed and data rich sound message in the high frequencies, thanks to the OCC silver mono strands, without spoiling the bass which maintains all its dynamic. The medium is remarkably open and accurate, and the sound image ensures an incredible opening.

Ref. CHENONCEAU-RCA | 1.00 m Ø 12 mm
Made to measure cable, on request



CHENONCEAU
DIAPASON FRANCE

"Sound image focused on fullness but homogeneity. This strong section cord uses two twisted and separated conductors in pure silver. Those benefit of the "Hollow Tubes" technology based on air. The Chenonceau is equipped with an antivibration nylon braid, an aluminium strip and a double PTFE insulation.

Recommended for symmetric audio digital links for high quality devices (sources, processors, converters).



CHEVERNY EBU MASTER MASTER

The MASTER Edition of cables series CHEVERNY is assembled by hand in France with the greatest care. They offer the best connection.

These specifics models are accompanied by an authenticity certificate, including a manufacturing number, thanks to which the product can be followed although its life.

These cables assembled in France benefit also of the life-time REAL CABLE warranty.

CHEVERNY II- AES / EBU

Prestigious symmetric audio digital cable assembled in France



Very high quality and highly deoxygenated copper (OCC) conductors, strands in 2 different sections (TDC), very strong section cable, double shielding and asymmetrical shielding, metallic monoblock plugs with ClickLock®, gold contacts, hand soldered, 1 male XLR plug / 1 female XLR plug, assembled in France.

An antivibration nylon braiding and a high density braiding of the mass provide a very good isolation of the transported signal. Solid ClickLock® plugs for a perfect holding throughout the time. Everything is gathered in order to offer an excellent symmetric audio digital link.

Ref. CHEVERNY II-EBU | 1.00 m

Ø 9 mm

Made to measure cable, on request

MASTER

The audio standard AES / EBU is used for digital audio signals transmission. This standard was developed jointly by the AES (Audio Engineering Society) and EBU (European Broadcasting Union). Using a balanced cable with XLR, digital audio AES/EBU link is superior in quality to the standard coaxial connection. Therefore, it is found mostly on high-end devices.



CHENONCEAU EBU MASTER

The MASTER Edition of cables series CHENONCEAU is assembled by hand in France with the greatest care. They offer the best connection.

These specifics models are accompanied by an authenticity certificate, including a manufacturing number, thanks to which the product can be followed although its life.

These cables assembled in France benefit also of the life-time REAL CABLE warranty.

CHENONCEAU EBU

Prestigious symmetric audio digital cable assembled in France



Very high quality and highly deoxygenated copper (OCC) conductors, strands in 2 different sections (TDC), very strong section cable, double shielding and asymmetrical shielding, metallic monoblock plugs with ClickLock®, gold contacts, hand soldered, 1 male XLR plug / 1 female XLR plug, assembled in France.

An antivibration nylon braiding and a high density braiding of the mass provide a very good isolation of the transported signal. Solid ClickLock® plugs for a perfect holding throughout the time. Everything is gathered in order to offer an excellent symmetric audio digital link.

Ref. CHENONCEAU-EBU | 1.00 m

Ø 12 mm

Made to measure cable, on request

MASTER

Recommended for symmetrical stereo audio connections between an amplifier or a preamplifier and a CD/SACD player, etc. For AES/EBU connections, made to measure and assembled in France XLR 128 or XLR 12165 single cable are advised.

XLR 128-2

Very high quality symmetric audio stereo cable



Pictures may differ from actual products

99.99% oxygen free copper (OFC) conductors, strong section cable, double shielding, metallic plugs with ClickLock®, gold contacts, many available lengths, 2 male XLR plugs / 2 female XLR plugs.

Very balanced and defined sound. ClickLock® plugs ensure a reliable and durable connection.

Ref. XLR128 | 1.00 m Ø 8 mm
Made to measure cable, on request



LIMITED EDITION ASSEMBLED IN FRANCE

The MASTER Edition of cables series CHEVERNY is assembled by hand in France with the greatest care. They offer the best connection. These specifics models are accompanied by an authenticity certificate, including a manufacturing number, thanks to which the product can be followed although its life. These cables assembled in France benefit also of the life-time REAL CABLE warranty.



CHEVERNY II-XLR

Prestigious symmetric audio stereo cable assembled in France



Very high quality and highly deoxygenated copper (OCC) conductors, strands in 2 different sections (TDC), very strong section cable, double shielding and asymmetrical shielding, metallic monoblock plugs with ClickLock®, gold contacts, hand soldered, 2 male XLR plug / 2 female XLR plug, assembled in France.

An antivibration nylon braiding and a high density braiding of the mass provide a very good isolation of the transported signal. Solid ClickLock plugs for a perfect holding throughout the time. Everything is gathered in order to offer an excellent symmetric audio stereo link. It delivers a very well-balanced and natural sound message thanks to the OCC copper conductors, with TDC technology. The bass is deeper and more dynamic. The medium is rich and the sharp accurate. Finally, the sound image ensures a wide opening.

Ref. CHEVERNY II-XLR | 1.00 m Ø 9 mm
Made to measure cable, on request

MASTER

Recommended for symmetric audio stereo links between amplifiers, peramplifiers, CD/SACD players, etc..



LIMITED EDITION ASSEMBLED IN FRANCE

The MASTER Edition of cables series CHENONCEAU is assembled by hand in France with the greatest care. They offer the best connection. These specifics models are accompanied by an authenticity certificate, including a manufacturing number, thanks to which the product can be followed although its life. These cables assembled in France benefit also of the life-time REAL CABLE warranty.



CHENONCEAU-XLR

Prestigious symmetric audio stereo cable assembled in France



Very high quality and highly deoxygenated silver (OCC) conductors, 2 separated conductors (1 mono strands for « plus », 1 mono strands for « minus »), twisted conductors (decrease of the linear inductance), very strong section cable, insulation of conductors with «Hollow tubes» (anti-vibration and capacitive effect reduced), metallic monoblock plugs with ClickLock®, gold contacts, hand soldered, 2 male XLR plug / 2 male XLR plug, assembled in France.

An antivibration nylon braiding and a high density braiding of the mass, an aluminum strip, a double isolating PTFE and Hollow Tubes of low capacitive effect, provide a foolproof isolation of the transported signal. Solid Twistlock plugs for a perfect holding throughout the time. Everything is gathered in order to offer a very detailed and data rich sound message in the high frequencies, thanks to the OCC silver mono strands, without spoiling the bass which maintains all its dynamic. The medium is remarkably open and accurate, and the sound image ensures an incredible opening.

Ref. CHENONCEAU-XLR | 1.00 m Ø 12 mm
Made to measure cable, on request
Also available EBU connection

MASTER

Recommended for coaxial digital audio connections between an amplifier, a home theater preamplifier or digital to analog converter and a CD/SACD player, a DVD/Blu-ray player, a digital TV decoder, etc.

EAN -2

Very high quality digital audio cable



99.99% oxygen free copper (OFC) conductors, 75 ohms adjusted, strong section cable, double shielding, metallic plugs, gold contacts, several available lengths, 1 male RCA plug / 1 male RCA plug.

Very balanced and defined sound.

Ref. EAN-2 | 1.00 m | 2.00 m | Ø 7 mm



Pictures may differ from actual products

AN 99

High fidelity digital audio cable



99.99% oxygen free copper and silver (SPC) conductors, very strong section cable, triple shielding, metallic monoblock plugs, gold contacts, several available lengths, 1 male RCA plug / 1 male RCA plug.

Thanks to the silver, the sound message gains in precision and fineness. The rendering is rich in micro-information.

Ref. AN99 | 1.00 m | Ø 9 mm



Pictures may differ from actual products

CNUG2

Lossless digital audio converter



Recommended to convert optical/coaxial digital audio to coaxial/optical digital audio.

- > Inputs : 1 optical (TosLink), 1 coaxial (SPDIF)
- > Outputs : 1 optical (TosLink), 1 coaxial (SPDIF)
- > External DC power supply (no electric interference)
- > Audio compatibility : PCM 2.0, Dolby® Digital EX and DTS™ ES

Ref. CNUG2



Recommended to convert an analog stereo audio signal to coaxial and/or Toslink stereo digital output signals.


NANO DAC MKII

Bidirectional Analog/Digital Converter


This combined digital-to-analog / analog-to-digital audio converter is designed for home or professional audio switching. It converts coaxial or optical digital audio input to stereo analog output via RCA or 3.5 mm, and can also convert analog audio signals to digital audio signals. It can convert audio signals in both directions.

Spécifications

• Entrées Audio	Audio numérique Coaxial/Toslink, Audio stéréo Jack 3.5mm et Audio analogique Gauche/
• Sorties Audio	Audio numérique Coaxial/Toslink, Audio stéréo Jack 3.5mm et Audio analogique Gauche/
• Taux d'échantillonnage	32 / 44,1 / 48 / 64 / 88,2 / 96 kHz
• Dimensions (L-I-H)	87x62x25mm
• Poids Net	53g
• Garantie	2 ans pièces et main d'oeuvre
• Consommation	1 watt max
• Alimentation	Cable micro USB
• Certifications	FCC, CE, RoHS

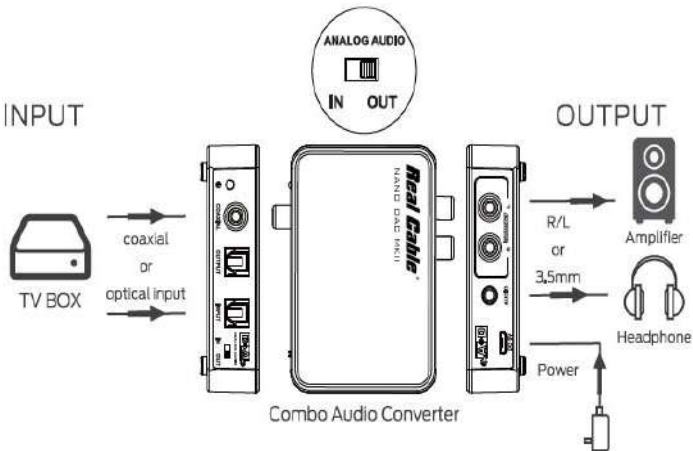

Mode 2: Analog to Digital (Switch : Analog Audio IN)

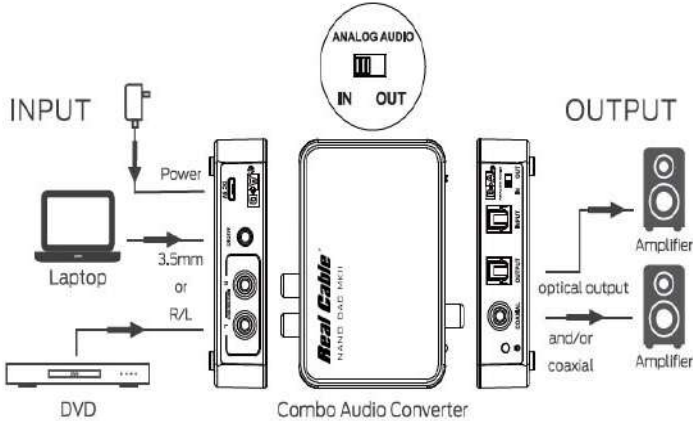

Recommended for audio digital optical connections between an amplifier, a Home Theater preamplifier or digital to analog converter and a CD/SACD player, a DVD/Blu-ray player, a digital TV decoder, etc.

OTT 70


Very high quality optical audio cable



PMMA conductor (polymethylmethacrylate), strong section cable, metallic plugs, triple protection, many available lengths, 1 male TosLink plug / 1 male TosLink plug.

Very balanced and defined sound.

Ref. OTT70 | 0.80 m | 1.20 m | 2.00 m | 3.00 m | 5.00 m | 10.00 m | Ø 6 mm

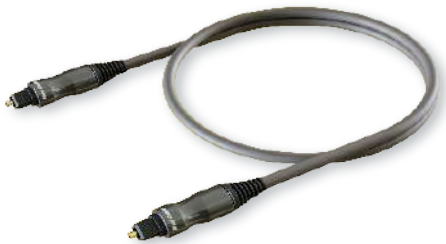

OJT70


Optical Audio Cable Toslink M/ MiniToslink M



High quality cable recommended for digital optical audio connections between an amplifier, home theater pre-amplifier or digital converter.

Made with high quality optical fiber with a large section protected by a conductive PMMA (PolyMethyle MethAcrylate).

Ref. OTJ70 | 0.80 m | 1.20 m | 2.00 m | Ø 6 mm

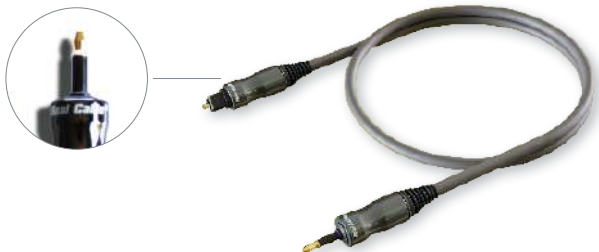

OTTG

High fidelity optical audio cable



PMMA conductor (polymethylmethacrylate), strong section cable, metallic plugs, triple protection, several available lengths, 1 male TosLink plug / 1 male TosLink plug.

With its acrylic glass fiber, the transmission of digital data is ensured without loss, with a rich, precise and detailed sound message.

Ref. OTTG | 1.00 m | Ø 6 mm



HD2A113-4K

Convertisseur audio HD

NEW

The HD2A113-4K converter allows you to convert an HDMI audio signal into digital audio (optical and coaxial) as well as into analog audio (3.5mm jack). This device is the ideal solution for users of HDMI® products who wish to stream high-quality sound to an external audio system. The HD2A113-4K is powered by an external power supply that does not generate any electrical interference.

Ref. HD2A113-4K



Recommended for audio digital optical connections between an amplifier, a Home Theater preamplifier or digital to analog converter and a CD/SACD player, a DVD/Blu-ray player, a digital TV decoder, etc.



ZOOM

CRYSTAL 2

Prestigious optical audio cable

MASTER



Real multi strand glass conductor, strong section cable, metallic plugs, triple protection, several available lengths, 1 male TosLink plug / 1 male TosLink plug.

A PVC sheathing and double FPE and PE insulator in black ensures a foolproof insulation of the signal being transported. Monoblock Jacks to facilitate the connection and real multi strand glass fiber for increased flexibility and an optimal transmission quality, all combine to provide the best optical digital audio connection. The transmission of digital data is perfect. The sound message is identical to the original.

Ref. CRYSTAL 2 | 0.75 m | 1.00 m | 1.50 m | Ø 7 mm



Power

power cables

Recommended for power connections of electrical devices with removable IEC cable. The quality of the power supply conditions the operation of Hi-Fi and Home Theater devices and influences in no small manner on the sound or visual result. Whether the elimination of interference or the regard of the current dynamic by the quality of conductors, an optimized power supply always goes in the direction of a better quality image and sound.

POWER CABLES

PSKAP 15

POWER CABLE FOR IEC C7 Cable



Recommended for power connections of electrical devices with detachable IEC C7 cable. The combination of asymmetric shielding and Kapton® film, a material from the aerospace field (resists 290,000 V/mm), creates a shield distributed along the cable, acting as an effective filter against EMI/RFI interference. The copper braid shielding connected only on the male plug side allows to eliminate interference without grounding. The male and female plugs have high electrical insulation. The OFC copper conductors with a cross-section of 1.5mm² offer very low resistance and ensure a current connection of up to 10 Amperes. Everything is combined to provide the best power connection for your integrated amplifiers, home theater, CD players, network players, televisions, Apple TV, wireless speakers, and amplified speakers.

Ref. PSKAP15 | 1,50 m | 2,50 m Made to measure, on request



Recommended for power connections of electric devices with removable IEC cable.

PSKAP 25

High fidelity power cable



99.99% oxygen free copper (OFC) conductors, 2.5 mm² (x3) section, double shielding and asymmetrical shielding, Kapton® insulation, ferrites, molded plugs, gold contacts, several available lengths, 1 male straight IEC plug / 1 male French plug.

The combination of asymmetrical shielding and the Kapton® film, a material derived from the field of aeronautics (resistant to 290 000 V/mm), creates a screen divided along the cable acting as a performing filter.

Ref. PSKAP25 | 1.50 m | 2.50 m
Made to measure cable, on request



CHAMBORD

Prestigious power cable assembled in France **Also available with Neutrik Powercon Plug**



Very high quality and highly deoxygenated copper (OCC) conductors, very strong section cable (3 x 4 mm²), double shielding and asymmetrical shielding, Furutech® plugs, rhodium contacts, hand soldered, 1 male straight Schuko plug / 1 male straight IEC plug, assembled in France cable.

Recommended for power connections of electrical devices with removable IEC cable. An anti-vibration nylon braid, a braiding of high-density asymmetrical shielding screen acting as a dummy screen and an aluminum strip ensure foolproof insulation against EMI/RFI interferences. Cotton fibers woven between conductors for an optimized cushioning. OCC conductors for a minimum resistivity of the material and maximum current capability. The Furutech® plugs provide a very high electric isolation and high quality contact thanks to Rhodium. Everything is brought together to provide the best electrical connection, which will free the dynamics of power amplifiers and ensure a very high level reproduction quality with audio and video devices.

Ref. CHAMBORD | 1.00 m | 1.50 m | 1.50 m
Made to measure cable, on request

MASTER

EDITION LIMITEE ASSEMBLEE EN FRANCE

Les câbles en édition limitée de la série CHAMBORD sont assemblés en France à la main et avec le plus grand soin, afin d'offrir la meilleure interconnexion possible. Ces modèles spécifiques sont assortis d'un certificat d'authenticité qui comprend un numéro de fabrication afin d'assurer un vrai suivi pendant toute la vie du produit. Ces câbles assemblés en France bénéficient également de la garantie à vie Real Cable.



ITEM

Nomad

nomad cables & accessories

iPlug range has been developed to meet the needs of the new generation products such as MP3 players, Smartphones or Tablets. Designed to be handled regularly, these cables are easy to live with and are made with an exemplary quality.

- MICRO USB CABLE
- AUDIO CABLES
- ACCESSORIES

iPlug USB Micro

Micro USB cable



99.99% oxygen free copper (OFC) conductors, double shielding, anti-twist flat cable, retaining clip, molded plugs, gold contacts, 1 USB A plug / 1 micro USB B plug.

Perfect for recharging smartphone or tablet. It allows to sync files on a computer with a fast transfer. The OFC/Aluminium double shielding assures a reliable protection.

Ref. iPlug-USB Micro | 0.75 m | 1.50 m | 3.00 m (H) 2.5 x (L) 5 mm



Recommandés pour les liaisons audio stéréo d'un casque, iPod, iPhone, iPad, baladeur MP3, smartphone ou ordinateur.

iPLUG USB60

Fast Charging cable - USB C/ USB C

NOUVEAU

The REAL CABLE® USB60 cable is designed for fast charging and high-performance data transmission. Equipped with a USB-C connector capable of delivering 60W of power, it ensures ultra-fast recharging for your smartphones, tablets, laptops, and other compatible devices. Thanks to its high-quality design, it guarantees excellent durability with a high and consistent data transfer rate of 480Mbps. Its very flexible and sturdy outer sheath ensures that you can use it without having to untangle the cable constantly and without deformation. This cable is made of tinned copper to ensure intensive use, and it is also protected from external interference by a copper braid and a graphene film that guarantee perfect insulation. Ideal for those looking for a reliable and high-performing cable for everyday use, at home or on the go.



Ref. iPLUG- USB60 | 1,60m



Avantage +

A USB charging cable **incorporating graphene** offers several notable advantages. :

- ✓ **Excellent thermal and electrical conductor, it provides a faster charge.**
- ✓ Its extreme mechanical resistance makes the cable much **more robust** and extends its lifetime.
- ✓ Graphene helps dissipate heat and **reduces the risk of overheating.**
- ✓ Allows the cable to be both **strong and flexible**
- ✓ **Reduced ecological impact** due to its longevity and energy efficiency

Technical details

• Reference	iPlug-USB60
• Proposed length	1m60
• Conductors	conducteurs en cuivre étamés
• Protection	double blindage (tresse en cuivre et film graphène)
• Plugs	moulées
• Cable	câble rond flexible
• Type	fiche USB C mâle
• EAN Code	1M60 : 3700195862700

cables

Recommended for audio stereo connections with headphones, iPod, iPhone, iPad, MP3 player, smartphone or computer.

iPlug J35M

High quality audio stereo cable



99.99% oxygen free copper (OFC) conductors, anti-twist flat cable, retaining clip, metallic plugs, gold contacts, 1 male JACK 3.5 plug / 1 male JACK 3.5 plug.

Ideal for connecting a computer, an MP3 player, a smartphone, an iPod, an iPhone, a Hi-Fi system or Home Theater.

Ref. iPlug-J35M | 1.50 m (H) 4 x (L) 2.6 mm



iPlug J35MF

High quality audio stereo extension



99.99% oxygen free copper (OFC) conductors, anti-twist flat cable, retaining clip, metallic plugs, gold contacts, 1 male JACK 3.5 plug / 1 female JACK 3.5 plug.

Ideal for extending the connection of a stereo headphone.

Ref. iPlug-J35MF | 1.50 m | 3.00 m (H) 4 x (L) 2.6 mm



iPlug J35M2F

High quality audio stereo splitter



99.99% oxygen free copper (OFC) conductors, anti-twist flat cable, retaining clip, metallic plugs, gold contacts, 1 male JACK 3.5 plug / 2 female JACK 3.5 plugs.

Ideal for splitting the audio output of a computer, an MP3 player, a smartphone, an iPod, an iPhone, an iPad, etc.. for listening for two.

Ref. iPlug-J35M2F | 0.20 m (H) 4 x (L) 2.6 mm



iPlug J35M2M

High quality audio stereo cable



99.99% oxygen free copper (OFC) conductors, anti-twist flat cable, retaining clip, metallic plugs, gold contacts, 1 male JACK 3.5 plug / 2 male RCA plugs.

Ideal for connecting a computer, an MP3 player, a smartphone, an iPod, an iPhone, a Hi-Fi system or Home Theater.

Ref. iPlug-J35M2M | 1.50 m | 3.00 m (H) 4 x (L) 2.6 mm



cables

Recommended for audio stereo connections with headphones, iPod, iPhone, iPad, MP3 player, smartphone or computer.

iPlug-CMHL Black cable

Ultra flat MHL cable (MHL1, 6 pins)



99.99% oxygen free copper (OFC) conductors, anti-twist flat cable, retaining clip, molded plugs, gold contacts, 1 male HDMI plug / 1 male micro USB plug.

This is the essential cable to connect your MHL compatible Smartphone or Tablet to an MHL device such as an audio-video amplifier or a new generation flat screen. Flat anti-twist cable. Optimized link thanks to the spacing between the data channels.

Ref. iPlug-CMHL | 0.75 m | 1.50 m | 3.00 m



i-DAC 192 kHz

DAC 24 bits / 192 kHz



i-Dac 192 kHz is an affordable and easy DAC to use wich offers a far superior sound, bypassing the poor quality into your computer system or tablet.

i-Dac 192 kHz is a stylish flash drive Digital Audio Converter that connects from USB to MAC®, Windows®, or tablet, turning any computer into High Quality.

Ref. iDac-192/B (black)

Ref. iDac-192/S (silver)



ZOOM



Recommended for audio stereo connections with headphones, iPod, iPhone, iPad, MP3 player, smartphone or computer.

Nano-LP1

Stage Preamplifier

This NANO-LP1 stereo phono stage for turntables allows connecting a turntable to audio equipment without phono input.

It deploys RIAA equalization circuitry that can recover the original sound from a phonographic disk. Delivery with an adapter AC 220V, but it advises to use battery 9V to avoid electrical disturbance generated by the sector.

Technical specifications

- > Power supply : 9 V DC battery or adapter 220 V AC/ 9 VDC
- > Current consumption : 1 mA (average)
- > Input impedance : 50 K Ohms
- > Output impedance : 50 K Ohms
- > Amplification : 34 dB
- > Frequency range : 30 Hz – 20 KHz
- > Compensation : RIAA correction
- > Real Cable Moniteur 2RCA-1/ 1m supplied

Ref. NANO-LP1



ZOOM



Mini-LP50

Phone Preamplifier MM/MC

This new Real Cable® phono preamplifier lets you connect your turntable directly to your amplifier when it is devoid of phono input.

REAL CABLE's engineers have been working on the quality of intern components for this phono preamp. They stimulated a separate power supply, which allows complete isolation. This power gives us an excellent signal / noise.

«We have found appropriate to avoid the use of a linear power supply, a solution with a DC/DC converter inside Mini-LP50.»

« The DC/DC converter used in our high frequency preamplifier works (up to above 20 KHz), which allows to have a complete cancellation regarding the filter residue at 50 Hz and 100 Hz. It shows a quality listening devoid of any intern noise. The graph below demonstrates the importance of the power inside Mini LP50 compared with others competing brands that do not use this technology.»


«The RC filters (resistor / capacitor) were added in the input stages inside Mini LP50. We used 4 filters coupled in pairs on each channel to prevent noise overlay the signal.»

The results both in signal noise and distortion rate harmonic, are simply amazing. The Real Cable Mini LP50 becomes the unique reference for preamplifier.»

Technical specifications

- > Supply power : Adaptator 220 V AC/DC 12 V
- > Current consumption : 100 mA (average)
- > Input Impedance 47 K Ohms MM / 100-Ohms MC
- > Output Impedance 50K Ohms
- > Amplification 34 dB MM / 60 dB MC
- > Frequency Range 30 Hz - 20 KHz
- > Correction RIAA
- > SB Rapport 80 dB MM / 75 dB MC

Ref. Mini-LP50



Competitors interference Real Cable



Dimensions (L x l x P) : 160 x 140 x 46 mm



cables

Recommended for audio stereo connections with headphones, iPod, iPhone, iPad, MP3 player, smartphone or computer.

iPlug-BTX

Bluetooth Transmitter Analog Jack 3,5 mm

Ideal for example for coupling a TV screen to a Bluetooth headphone. Connected up to 2 devices (headphone or music receiver).

Its A2DP compatibility assures a perfect universality and the aptX, an excellent audio quality (16 bits/44,1 kHz transmission).

- > Real Cable Moniteur JRCA-1/ 1m50 supplied

Ref. iPlug-BTX



iPlug-BTX-HD

Bluetooth Transmitter Digital Optical

Ideal for example for coupling a TV screen to a Bluetooth headphone. Connected up to 2 devices (headphone or music receiver).

Its A2DP compatibility assures a perfect universality and the aptX, an excellent audio quality (16 bits/44,1 kHz transmission).

- > Real Cable Moniteur OPT-1/ 0m75 supplied

Ref. iPlug-BTX-HD



iPlug-BTR-HD

Bluetooth aptX HD receiver



When connected to an Hi-Fi or Home Theater amplifier, the Bluetooth receiver allows the wireless spreading of the music stocked in mobile devices, such as laptop, tablet or smartphones.

Its A2DP compatibility assures a perfect universality and the aptX, an excellent audio quality (24 bits/48 kHz transmission).

Technical specifications

- > Bluetooth V 5 : Profil AD2P, NFCW
- > Codecs : aptX and SBC
- > Devices memorized : up to 8 max.
- > Analog output : stereo (Jack 3.5 mm)
- > Digital output : optical (Toslink)
- > Bandwidth : 20 - 20 000 Hz +/- 3 dB
- > Channel separation : 45 dB
- > Signal/noise ratio : 104 dB
- > Distorsion : 0,05 %
- > Range : 20m in free field
- > Power supply : external (5 V - 0,6 A)
- > Real Cable Moniteur JACK-1/ 1m50 supplied

Ref. iPlug-BTR-HD



ITEM

Data

data cables

Recommended for computer links of audio-video devices. Images and sounds are now stored in digital, so that the world of audio and video converge with computers. Indeed, the links between these two worlds require quality links to keep all the data exchanged and get excellent performance.

ETHERNET
USB

E-NET 600 - 2

Câble Ethernet haute qualité



99.99% oxygen free copper (OFC) conductors, simple shielding, ultra-flat cable, compact molded jacks, gold contacts, 1 RJ45 plug / 1 RJ45 plug, category 6, UTP configuration.

Shielded jacks for perfect insulation of data against external interference. Conductors designed to provide a bitrate of 1000 Mbits/s (Gigabits). UTP configuration for better picture and sound quality. Tangle-free flat cable. It ensures high quality Ethernet connection and makes life easy.

Ref. E-NET600-2 | 1,00 m | 3,00 m | 5,00 m | 10,00 m | 15,00 m (H) 6 x (L) 2 mm

UTP 600 / UTP 600 LSZH

High Quality Ethernet Cable



NEW



Oxygen-free copper conductors (OFC) at 99.99%, single shielding, round cable, multi-stranded wires (for crimping RJ45 connectors), category 6, UTP configuration, 24 AWG

Drivers designed to provide a data rate of 1,000 Mbits/s (Gigabits). UTP configuration for better image and sound quality. Perfect for a handmade Ethernet connection.

UTP600 LSZH :

It presents the same specifications as the UTP600 with the additional advantage of a fire-resistant outer sheath LSZH.

Ref. UTP600 | 305 M White cable
Ref. UTP600 LSZH | 305 M Purple Cable

Ethernet cables are recommended for wired network connections of UPnP/DLNA devices. USB cables are recommended for connections between a computer and a DAC (digital to analog converter), or between a UPnP/DLNA bridge and a storage medium.

EIGHT STREAM

Ethernet Cable CAT 8

NEW

The CAT 8 Ethernet cable provides exceptional performance for fast and stable internet connections. With a transfer speed of up to 40 Gbps, it surpasses the standards of traditional cables, making it ideal for streaming, gaming, and home office. Its robust design reduces interference for optimal signal quality. Each pair is individually twisted and shielded. This OFC copper cable features shielding made of aluminum foil and copper braid. It is assembled with a CAT 8 RJ45 connector and a robust die-cast zinc housing that is fully shielded. The Eight Stream from REAL CABLE® will offer you ultra-fast transfer speeds with a bandwidth of 2 GHz, while ensuring a stable and optimized network connection.

Ref. EIGHT STREAM | 1,00 m | 2,00 m | 3,00 m | 5,00 m



ZOOM

UNIVERS

High fidelity USB cable



99.99% oxygen free copper and silver (SPC) conductors, strong section cable, double shielding, metallic plugs, gold contacts, several available lengths, 1 USB A plug / 1 USB B plug.

An anti-vibration nylon braid, a braiding of high-density shielding, an aluminum strip and metallic plugs ensure foolproof insulation against interference. Conductors designed to provide a bitrate of 480 Mbits/s and USB 2.0 compliance (power conductors are separate from data conductors). Everything is brought together to offer a high quality USB connection and release all the details and fineness of the music, not to mention the precision and the colors of high definition videos.

Ref. UNIVERS | 1,00 m | 2,00 m



Accessories

accessories

As a specialist of the audio & video connection, Real Cable® propose many accessories to complement Hi-Fi and Home Cinema system. Banana or BFA speaker terminals, antenna, RCA or XLR plugs for made to measure cables, DVI or RCA adapters, ferrites, cable management, there's always a solution for connections problems.

Recommended to remote control audio-video devices hidden in a closed furniture or in another room.

RC14IR & RC06IR

Infrared extender & extension box



RC14IR



RC06IR

- > Control 4 devices, and more (up to 8) thanks to the wide diffusion emitter design.
- > Frequency range from 20kHz to 60kHz. Supports all devices on the market, except B&O.
- > One receiver for horizontal position, with wide angle IR reception. Up to 8 m in +/- 45° angle.
- > Possibility to add 6 more devices by using extension box RC06IR (optional). This extension box doesn't need any power supply and is connected to the RC14IR through a CAT5 Ethernet cable up to 250 m maximum length. Perfect for multiroom uses.

Main unit RC14IR

1 x 5 V DC power socket
 2 x Jack for IR emitters
 1 x Jack for IR receiver
 1 x RJ45 for RC06IR extension box (optional)
 Dimensions : 62 (W) x 50 (D) x 23 (H) mm
 Weight : 78 g
 Mounting size : 70.5 x 32 mm

IR Receiver

Reception range : 8 m
 Reception angle : +/- 45°
 Cable's length : 2 m
 Dimensions : 31 (W) x 31 (D) x 14 (H) mm

IR Emitter


Transmission range : +/- 50 cm
 Transmission angle : 90°
 Cable's length : 2 m

Additional unit RC06IR

1 x 5 V DC power socket (must not be used)
 3 x Jack for IR emitters
 1 x RJ45 to connect to RC14IR
 Dimensions : 62 (W) x 50 (D) x 23 (H) mm
 Weight : 78 g
 Mounting size : 70.5 x 32 mm

IR Emitter

Transmission range : +/- 50 cm
 Transmission angle : 90°
 Cable's length : 2 m

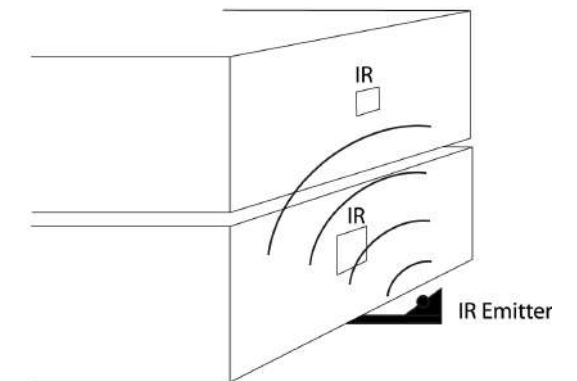


Wide transmission emitter

Control all your hidden devices

Ref. RC14IR | infrared extender

Ref. RC06IR | extension box (6 additional devices or multiroom)

Installation example

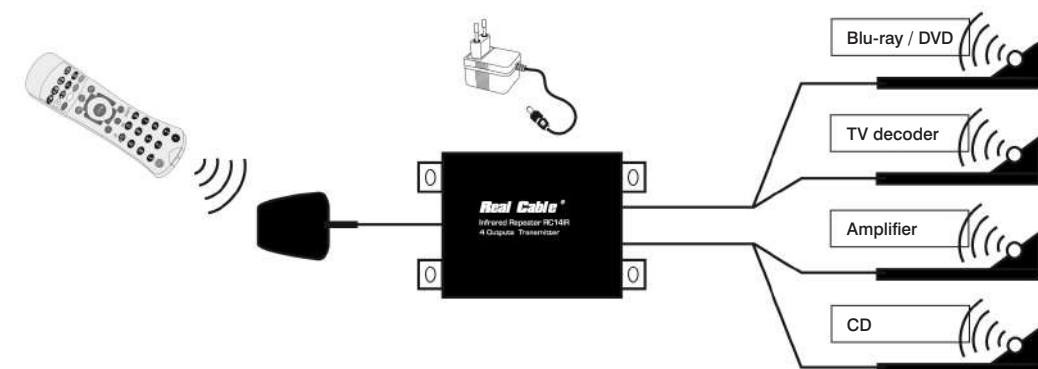

The use of speaker terminals is highly recommended for reliable and efficient amplifier - speaker cable - speaker connections, and also for easy and quick installation.

B7210

Banana terminals

Model to screw (doesn't need a soldering iron) or to solder. Support up to 8 mm² speaker cables. Multi gold contacts.

Perfect for speaker cables from BWOFC & TDCOCC range.

Ref. B7210 | set of 2 red terminals + 2 black terminals

PROTECTION

METAL

PLUG

CONTACT


24K

GOLD

Ø MAX

8

MILLIMETERS



BF7205

Speaker cable terminal

Model to screw or solder. Support up to 8 mm² speaker cables. Universal model (one body, two possibilities : fork or banana terminals). Gold contacts.

For a perfect finish while making HD-TDC made to measure cables. Also suitable for TDC and BM speaker cables.

Ref. BF7205 | set of 4 plugs + 4 fork terminals + 4 banana terminals

PROTECTION

METAL

PLUG

CONTACT


24K

GOLD

Ø MAX

8

MILLIMETERS



B6159

Banana terminals

Model to screw (doesn't need a soldering iron). Secure Lock plug : protection of the retractable contact. Support up to 8 mm² speaker cables. Gold contacts.

Ref. B6159 | set of 2 red terminals + 2 black terminals

CONTACT


24K

GOLD

Ø MAX

8

MILLIMETERS



REP4160 / REP5160

Speaker cable splitter

Round metal splitter for 2 or 4 cables.

For a perfect finish while making BWOFC400 and HD-TDC made to measure cables.

Ref. REP5160 | 36 mm | 1 piece


Ref. REP4160 | 15 mm | 1 piece

Ref. REP7118 | For 3 cables 6 mm²

Ø MAX

16

MILLIMETERS



REP4160

Plugs recommended for made to measure audio cables.

R6872

Male RCA plugs / 2 colors

Model to solder. Support up to 7 mm outer diameter cables. Gold contacts. Metal body for a perfect shielding.

Ref. R6872-2C/6 | Max. Ø 6 mm | set of 2 red plugs + 2 black plugs

PROTECTION

METAL PLUG

CONTACT


24K

GOLD

Ø MAX

7

MILLIMETERS



R6619

Male RCA plugs / 2 colors

Monoblock model to solder. Support up to 9 mm outer diameter cables. Gold contacts. Metal body for a perfect shielding.

Ref. R6619-2C/9 | Black - Red - White Max. Ø 9 mm

PROTECTION

METAL PLUG

CONTACT


24K

GOLD

Ø MAX

9

MILLIMETERS



R6913

Male RCA plugs / 2 colors

Monoblock model to solder. Support up to 13 mm outer diameter cables. Gold contacts. Metal body for a perfect shielding. TwistLock® plug.

Ref. R6913-2C/13 | Max. Ø 13 mm | 1 piece

TECHNOLOGY

TWISTLOCK®

PROTECTION

METAL PLUG

CONTACT


24K

GOLD

Ø MAX

13

MILLIMETERS



Plugs recommended for made to measure XLR, antenna cables, power cables. RCA adapters to adjust various audio interconnctions.

XLR6403 / XLR6404

XLR Plug

Monoblock model to solder. Support up to 14 mm outer diameter cables. Gold contacts. Metal body for a perfect shielding. ClicLock® plug.

- Ref. XLR6403MR | male (red) | 1 piece
- Ref. XLR6403MB | male (white) | 1 piece
- Ref. XLR6404FR | female (red) | 1 piece
- Ref. XLR6404FB | female (white) | 1 piece



M F M F

XLR6612

XLR plug

Monoblock model to solder. Support up to 12 mm outer diameter cables. Gold contacts. Metal body for a perfect shielding. ClicLock® plug.

- Ref. XLR6612MR | male (red) | 1 piece
- Ref. XLR6612MB | male (white) | 1 piece
- Ref. XLR6612FR | female (red) | 1 piece
- Ref. XLR6612FB | female (white) | 1 piece



M F M F

FSAT

F type antenna plug

Model to screw and crimp or solder. Support up to 7 mm outer diameter cables. Gold contacts. Metal body for a perfect shielding.

- Ref. FSAT180 | straight F plug | 1 pair
- Ref. FSAT90 | 90° angled F plug | 1 pair



90° 180°

FTV180 / FTV90

European type antenna plug

Model to screw and crimp or solder. Support up to 7 mm outer diameter cables. Gold contacts. Metal body for a perfect shielding.

- Ref. FTV180/F | straight TV 9,5 mm plug | female | 1 pair
- Ref. FTV90 | 90° angled TV 9,5 mm plug | male | 1 pair



FTV 180 F FTV 90 M

A6071G

Male RCA / RCA extender

Recommended to extend RCA audio connections. Male and male RCA plugs. Gold contacts.

- Ref. A6071G | 1 pair



accessories

Adapters recommended to adjust video interconnections.

HDDC12

Female HDMI / mini Male HDMI adapter



Recommended to use a classic HDMI cable to connect your HD camcorder with a mini HDMI output.

Support 1 080p, 3D, ARC, HEC and 4K.

Gold contacts.

- > 1 female HDMI input (A type)
- > 1 male mini HDMI output (C type)




Secteur M / Secteur F

Male & female power plugs



European male power plug Schuko compatible. Female IEC type power plug. Perfect for power cable with conductors up to 3 x 4 mm² and outer diameter up to 13 mm. 250 VAC nominal voltage, 16 A nominal current.

- Ref. SecteurM (male) | 1 piece
- Ref. SecteurF (female) | 1 piece

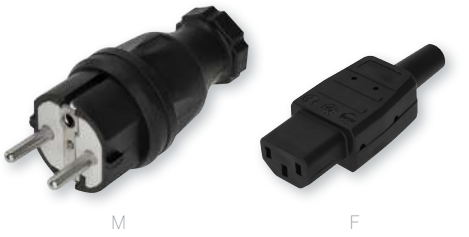

M F

Recommended while buying a flat TV, these packs include everything to take advantage of its new device with an unbeatable value for money.

A5056G
Male BNC to Female RCA Adapter

Recommended for RCA coaxial connections to BNC. Female RCA connectors and male BNC connectors: suitable for many applications. Gold contacts: optimized and high-quality connection.
Ref. A5056G | 1 pair



HDMI.F/DVI.M
HDMI female / DVI male adapter

Recommended for converting a device's DVI output to HDMI. Female HDMI and male DVI connectors. Digital video link. Gold contacts.
Ref. HDMI.F/DVI.M | 1 piece



HDMI.M/DVI.F
Male HDMI / Female DVI adapter

Recommended for converting an HDMI output of a device to DVI. Male HDMI connector and female DVI connector. Digital video link. Gold contacts.
Ref. HDMI.M/DVI.F | 1 piece



DVI.F/DB15.M
DVI female / DB15 male adapter

Recommended for DB15 / DVI analog video connections from computer to monitor, projector, or flat screens. Female DVI plug and male DB15 plug. Analog video connection. Gold contacts.
Ref. DVI.F/DB15.M | 1 piece



DVI.M/DB15.F
Male DVI adapter / female DB15

Recommended for analog video connections DB15 / DVI from computer to monitor, projector, or flat screens. Male DVI plug and female DB15 plug. Analog video connection. Gold contacts.
Ref. DVI.M/DB15.F | 1 piece



DB15/3RCA
Adaptateur DB15 mâle / 3 RCA femelles

Recommended for devices with a YUV input via the DB15 connector. Analog video link. Gold contacts.
Ref. DB15/3RCA | 1 pièce



DECOUPLING

The Real Cable decoupling spikes reveal all the subtleties of the musical reproduction by eliminating the masking effect due to interference vibrations. For the loudspeakers, they ensure a mechanical uncoupling in relation with the floor. Using the reduction of surfaces in contact with a single point, the loudspeakers do not transmit anymore frequencies to the floor that can be amplified by the phenomenon of mechanical room resonance. The Real Cable cones are also for uncoupling the audio-video devices from their supports and thus eliminating the interactive of the chain components.

C880
Decoupling set

Recommended to decouple columns loudspeakers or bookshelves on stand, audio-video devices or furnitures from the floor. Has to be fix on existing pads. 4 height-adjustable cones from 25 to 29mm. Easy to install (adhesive side). 35mm diameter. 4 floor pads included.

Ref. C880AGOLD (gold) | set of 4 spikes + 4 floor pads
Ref. C880ANOIR (black) | set of 4 spikes + 4 floor pads



C250A-Black/4 pcs
Decoupling set

Recommended to decouple columns loudspeakers or bookshelves on stand, audio-video devices or furnitures from the floor. Has to be fix on existing pads. 4 height-adjustable cones from 25 to 29mm. Easy to install (adhesive side). 35mm diameter. 4 floor pads included.


Ref. C250A-NOIR (blac) | set of 4 spikes + 4 floor pads



CPUNI
Floor pad

Recommended for speakers or devices already fitted with spikes, to protect wood floor and tiles. Universal model. 30 mm diameter.

Ref. CPUNI.GOLD (gold) | 1 piece
Ref. CPUNI.NOIR (black) | 1 piece



Vintage

Vintage - Destock

Recommended for computer links of audio-video devices. Images and sounds are now stored in digital, so that the world of audio and video converge with computers. Indeed, the links between these two worlds require quality links to keep all the data exchanged and get excellent performance.

FERR 2

Ferrite for interference suppression

Recommended for audio and video cables. Suppress all EMI/RFI interferences and thus decrease the noise in sound and picture. For 10 mm to 11 mm diameter cables.

Ref. FERR 2 | 1 piece

Ø 10 à 11 mm



Recommended for custom installation's high definition audio and video connections : DVD players, Blu-ray players, DVD recorders, digital TV decoders, Flat TVs, video projectors, video game consoles, Home Theater amplifiers. Send your HD signal up to 50 meters with the high quality Ethernet cable.

RJ45-8P-B

Crimping RJ45 plug



Fiche RJ45 8 pins blindée, pour câble CAT6.

Ref. RJ45-8P-G | 10 pieces

PRO RANGE



RJ45-TOOL

Crimping tool



It's an essential tool, especially designed to compress the Ethernet cable to the connector.

Ref. RJ45-TOOL

PRO RANGE

WACL-90

Adaptor HDMI F / HDMI F 90° Safelock for WPL Series

HDMI wallplates compatible with european wallboxes that have a 60 mm wheelbase.



Female / female HDMI angled coupler (90°).

Works with Real Cable® cables up to 15 m.

Gold contacts.

Also available alone as a passive straight coupler (Max,10m).



WP-CAT

HDMI wallplates with Real Cable® system integrated



Resolution up to 1080p50/60/24 on 45m

5V power supply for the supplied transmitter

Compatible with 2 network cables (from CAT5-6) and the same length (difference<10 cm)


Maximum length for HDMI cable : 2 m (not supplied)

Transmission length (UTP cable recommended) :

- with CAT5 UTP 24 AWG cable : 1080p/35M, 1080i/40M

- with CAT6 UTP 24 AWG cable : 1080p/45M, 1080i/60M

Operation transmitter + receiver on = connection OK

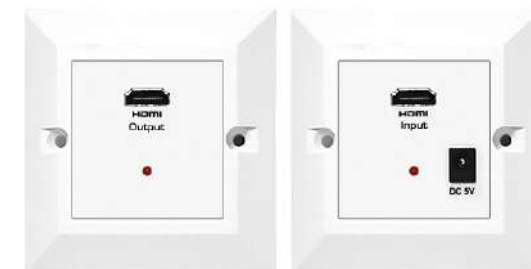

Recommended for custom installation's high definition audio and video connections : DVD players, Blu-ray players, DVD recorders, digital TV decoders, Flat TVs, video projectors, video game consoles, Home Theater amplifiers. Send your HD signal up to 20 meters with the high quality HDMI cable.

HTK500 S

HDTV Must Have

Contains :

- > 1 bottle of spray 120 ml
- > 1 soft microfiber cloth



- > 1 flat HDMI cable 1.5 m



- 99,99 % oxygen free copper (OFC) conductors, molded plug, gold contacts, 1 male HDMI plug / 1 male HDMI plug.
- > 4 soft pads and 6 cable holders
- > 1 power filter



Power filter (EMI / RFI 30 dB) and anti-thunder & surge protection, antenna protection (input / output), power handling 250 V – 10 A, bipolar switcher, 8 sockets whose 2 spaced, missing ground and active protection lights. Perfect to protect audio-video devices and get the best benefits from high definition signals.

Ref. HTK500



CKB200FS

Flat screen cleaning kit



Contains :

- > 1 bottle of spray 200 ml
- > 1 soft microfiber cloth
- > 1 dust removing brush

Ref. CKB200FS



Recommended for custom installation's high definition audio and video connections : DVD players, Blu-ray players, DVD recorders, digital TV decoders, Flat TVs, video projectors, video game consoles, Home Theater amplifiers. Send your HD signal up to 20 meters with the high quality HDMI cable.

iPlug-Charge

USB interface for iPad / DESTOCK



Synchronization / charging iPad via the USB port of a computer, 1 USB A port / 1 female USB A port, gold contacts. Essential for charging an iPad on a Windows PC without risking damage to the battery due to an inappropriate process. It also allows synchronization with fast file transfer. An ideal complement to the iPlug-USB30 cable.

Ref. iPlug-charge



TV 180 MF

Straight antenna cable/ DESTOCK




Copper conductors tinned and deoxidized to 99.99% (OFC), suitable for 75 ohms, high section cable, quadruple multi-layer shielding (aluminum/tinned copper sandwich for maximum screening efficiency), Gas-PE insulation (very low losses), ferrites at each end (to eliminate all EMI/RFI disturbances), metal plugs, gold contacts, various lengths available, 1 right male TV plug / 1 right female TV plug.

An unyielding efficiency, even in HDTV.

Ref. TV180MF | 3,00 m | 5,00 m

Ø 7,4 mm

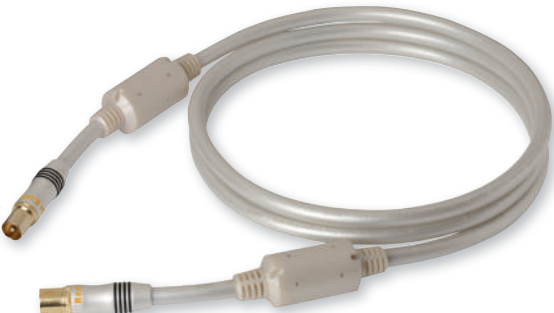



One product for one function

The new range of Moniteur by Real Cable is the entry level with a concept of simplicity without sacrificing quality, while being offered prices never seen before for a Real Cable's product. No need to think about the cable's quality when selecting, the products Monitor by Real Cable are life time warranty and are using one of the best qualities of copper (OFC) conductors. Moniteur by Real Cable's products make the difference playing on sobriety in the design of products, in packaging, in the range and also in the references. Choose a product Monitor by Real Cable, is to offer a good, quality, reliability product at the best price.

HDMI-1

HDMI cable



HDMI cable with gold contact plugs. Perfect for DVD players, Blu-ray players, game consoles and HTDV decoders connection to flat TVs, videoprojectors or Home Cinema amplifiers.

Ref. HDMI-1 | 1.00 m | 1.50 m | 2.00 m | 3.00 m | 5.00 m



TV-2

Universal Antenna cable



Antenna cable with gold contact plugs. Perfect for televisions, HDTV decoders, TV recorders connection to antenna wall plates. Male/female universal cable with male/male adapter included.

Ref. TV-2 | 1.50 m | 3.00 m | 5.00 m



OPT-1

Optical cable



Optical cable with gold contact plugs. Perfect for DVD players, Blu-ray players, game consoles and HTDV decoders connection to Home Cinema systems or amplifiers.

Ref. OPT-1 | 0.75 m | 1.50 m | 3.00 m | 5.00 m | 10.00 m



2RCA-1

Stereo cable



Audio stereo cable with RCA gold contact plugs. Perfect for CD players, tuners or other stereo devices connection to Hi-Fi systems or amplifiers.

Ref. 2RCA-1 | 0.50 m | 1.00 m | 2.00 m | 3.00 m | 5.00 m



SUB-1

Subwoofer cable



AV RECEIVER HI-FI AMPLIFIER SUBWOOFER

Audio cable with RCA gold contact plugs. Perfect for subwoofers connection to Home Cinema systems or amplifiers.

Ref. SUB-1 | 1.00 m | 2.00 m | 3.00 m | 5.00 m | 7.50 m | 10.00 m



YRCA-1

Audio Splitter cable



AV RECEIVER SUBWOOFER

Audio splitter cable with gold contact plugs. Perfect for mono audio signal input into stereo devices. Particularly recommended for subwoofers with stereo input.

Ref. YRCA-1 | 0.20 m



JACK-1

Stereo Jack cable



HI-FI AMPLIFIER IPOD / iPHONE / MP3 PC / MAC CAR AUDIO MOBILE SPEAKER

Audio stereo cable with Jack gold contact plugs. Perfect for MP3 players or other portable devices connection to Hi-Fi systems or amplifiers.

Ref. JACK-1 | 1.50 m



JRCA-1

Stereo Jack cable



HI-FI AMPLIFIER IPOD / iPHONE / MP3 PC / MAC CAR AUDIO MOBILE SPEAKER

Audio stereo cable with Jack gold contact plugs. Perfect for MP3 players or other portable devices connection to Hi-Fi systems or amplifiers.

Ref. JRCA-1 | 1.50 m



YJ35-1

Stereo audio splitter with 1 male jack and 2 females plugs



HI-FI AMPLIFIER

Perfect for splitting the output from a computer, MP3, iPod, iPhone, iPad, etc. to share the sound with 2 headphones.

The deoxygenated OFC copper strands and the aluminium double shielding make a reliable protection against interferences.

Ref. YJ35-1 | 0.20 m



LIGHT-1

USB cable with USB A plug and lightning plug



Ideal for synchronizing and charge iPhone, iPod, iPad with a computer.

It allows to sync files on a computer with a fast transfer.

The OFC/aluminium double shielding assures a reliable protection.

Ref. LIGHT-1 | 1.00 m



OTG-1

USB cable with USB OTG plug and micro plug

Perfect to connect an Android smartphone and transfer data with OTG (On The Go) protocol on USB key or hard drive USB plug.

It allows to sync files on a Android smartphone with a fast transfer. The OFC/aluminium double shielding assures a reliable protection.

Ref. OTG-1 | 0.15 m



SP VIM

SPEAKER CABLE CCA

This speaker cable is very flexible. Recommended for custom installations. The SPVIM cable is made of CCA copper, protected by a low-density PVC sheath in white, transparent, or black.

SP VIM TRANSPARENT

SPEAKER CABLE CCA



Ref. SPVIM 150	1.50 mm²	200 m
Ref. SPVIM 200	2.00 mm²	100 m
Ref. SPVIM 250	2.50 mm²	100 m



SP VIM BLACK

SPEAKER CABLE CCA



Ref. SPVIM 150 N	1.50 mm²	200 m
Ref. SPVIM 200 N	2.00 mm²	100 m
Ref. SPVIM 250 N	2.50 mm²	100 m



SP VIM WHITE

SPEAKER CABLE CCA



Ref. SPVIM 150 B	1.50 mm²	200 m
Ref. SPVIM 200 B	2.00 mm²	100 m
Ref. SPVIM 250 B	2.50 mm²	100 m



The use of plugs (banana, spade or BFA) allows for reliable, efficient, and secure connections between the amplifier, speaker cable, and speakers, while also enabling easy and quick connections. Banana plugs are particularly recommended at the back of amplifiers, where the density of speaker outputs can make connecting with bare wires difficult and hazardous. On the speaker side, there are several options: banana, spade, or BFA.

B6035AS

Soldering banana connectors



Welding models. Compatible with cables up to 5 mm². Gold multi-point contacts.

Ideal with HP cables from the CAT, LC, PRO10, CBV range.

Ref. B6035AS | set of 2 red plugs + 2 plugs black



B6932-2C/4PCS

Screw-on banana clips



Screw-on models with locking barrel (no soldering required). Compatible with cables up to 10 mm². Gold multi-point contacts. Compatible with bi-wiring (stackable plugs).

Ideal with HP cables from the FL, TDC, BM, TDCOCC range

Ref. B6932 | set of 2 red plugs + 2 plugs black



NEW



B6020-2C/8PCS

Screw-in banana clips / new version

NEW



Screw-on models (no need for a soldering iron). Compatible with cables up to 5 mm². Gold multi-point contacts.

Ideal with HP cables from the CAT, LC, PRO10, CBV range.

Ref. B6020-2C/8 PCS | set of 4 red plugs + 4 black plugs

Ref. B6020 R | red - pack of 50 pcs

Ref. B6020 B | black - pack of 50 pcs



BFA6020-2C/8PCS

Screw-in BFA cards / new version

NEW



Screw-in models (no soldering required). Compatible with cables up to 5 mm². Gold contacts.

Ideal with the HP cables of the CAT, LC, PRO10, CBV, TDC, BM, BWOFC, TDCOCC range.

Ref. BFA6020-2C/8 PCS | set of 4 red plugs + 4 set of black plugs

Ref. BFA6020 R | red - set of 50 pcs

Ref. BFA6020 B | black - set of 50 pcs



THEY TALK ABOUT US



Various tests done by several journalists throughout the world recognized the quality of Real Cable® products



BM400T

AUDIO VIDEO RUSSIA

"...a feeling of high dynamic..., an improved definition in high frequencies..., good balance and realistic sound stage... The Bi-Metal (BM) cable is made from silver and copper wires. This combination allows the passing of different frequencies signals, preserves the sound balance and doesn't cover any detail."



CA 1801

AUDIO POLAND

"CA-1801 looks extremely robust, elegant and designe... It enhances stereophony and sound stage... no problem with dynamic and bass kick..."



CHAMBORD

DIAPASON FRANCE

"Bright and clear sound image attesting to the recent and tangible progress of the brand. Reactive dynamics, always strongly conducted. The whole is really nice"

ADVERTISING ALL AROUND THE WORLD



CHENONCEAU

DIAPASON FRANCE

"Sound image focused on fullness but homogeneity. This strong section cord uses two twisted and separated conductors in pure silver. Those benefit of the "Hollow Tubes" technology based on air. The Chenonceau is equipped with an antivibration nylon braid, an aluminium strip and a double PTFE insulation."



CA-REFLEX

CLASSICA FRANCE

"The capacity of the CA-REFLEX to densify the sound without burdening it, convinced us. The listener feels like getting closer to the piano and perceiving the weight of the fingers on the keyboard, particularly those of the left hand. The instrument gains more volume, magnitude and sharpness..."



CA REFLEX & HDTDC

HAUTE FIDELITE FRANCE

"A superlative presentation for very successful cables. This couple has a good integration of mid-high frequencies, with a favorable subjective transparency..."



MASTER RANGE

SOUND MAGIC JAPAN



BM400

AUDIO VIDEO POLAND

"A very good definition cable, nice ventilation of the high frequencies..."



IPLUG BTR

QOBUISSIME FRANCE

"Bluetooth aptX, and now aptX HD, it's always amazed us, but with the iPlug-BTR, we are more than fascinated, we are delighted by the sound reproduction it delivers on its analog output."



INFINITE

ALTA FIDELIDAD SPAIN

"The quality of the image brought by the Infinite is sensational, in definition and in natural colors, without mentioning the capacity to carry the least information without parasites or interference..."



HDMI RANGE

WHAT HI-FI INDONESIA



HDMI RANGE

VIDEO EMOTION NETHERLANDS



INFINITE

FWD NETHERLANDS



HD-TDC

STEREO & IMAGE FRANCE



INFINITE II

HAUTE FIDELITE FRANCE



CA-REFLEX

WHAT HI-FI INDIA



The background of the advertisement features a close-up of several thick, braided audio cables in shades of red, orange, and blue. The cables are arranged in a dynamic, flowing pattern. One cable in the foreground has a silver connector with a red band that reads 'Real Cable'. Another cable further back has a similar band with 'Limited Edition' and 'Assembled in France' text. The overall aesthetic is modern and high-tech, with a color gradient from warm reds/oranges to cool blues.

Real Cable[®]
CONDUCTEUR D'ÉMOTIONS

REAL-CABLE.COM  

Z.A La Géode, 20 rue des 4 vents
91690 Guillerval
+33 (0)1 60 80 95 77 - export@real-cable.com